

H&S

ROTORY RAKE




Innovators in the Manufacture
of Agricultural and
Commercial Equipment


 **GENERAL
IMPLEMENT**
DISTRIBUTORS

QUALITY - TESTED - PROVEN - DURABLE!

RR420 ROTARY RAKE

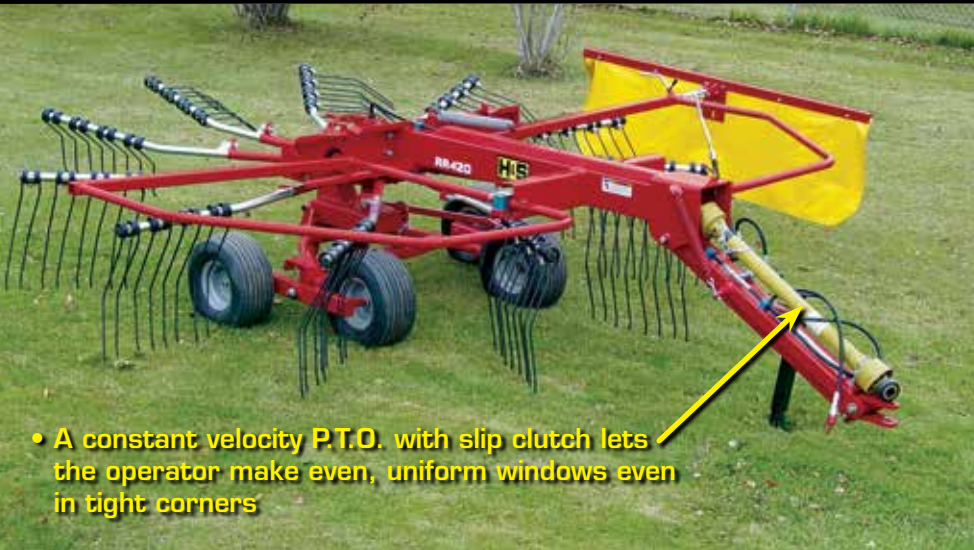


- A constant velocity P.T.O. with slip clutch lets the operator make even, uniform windows even in tight corners

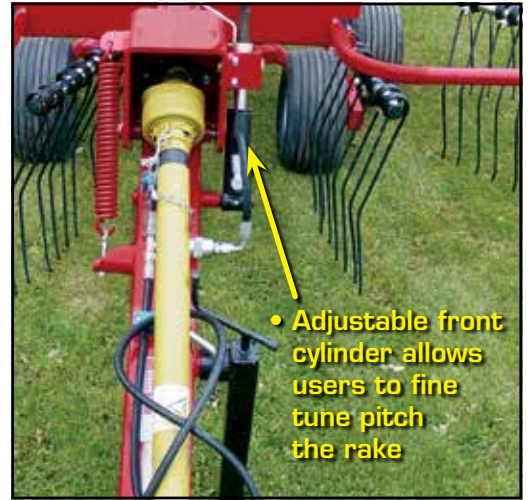

- Adjustable front cylinder allows users to fine tune pitch the rake


MODEL	RR420
NUMBER OF ARMS	11
NUMBER OF DOUBLE TINES PER ARM	4
WORKING WIDTH	13'8"
GEAR BOX	Sealed in oil bath
ROTOR DIAMETER (WORKING WIDTH)	11'2"
TRANSPORT WIDTH	5'9"
PTO DRIVELINE WITH SLIP CLUTCH	540 rpm Constant Velocity Overload Protects Gearbox
TIRES	4 Mounted On Tandem Axles 18X8.5x8
HP REQUIRED	30/45
WEIGHT	1369 lbs

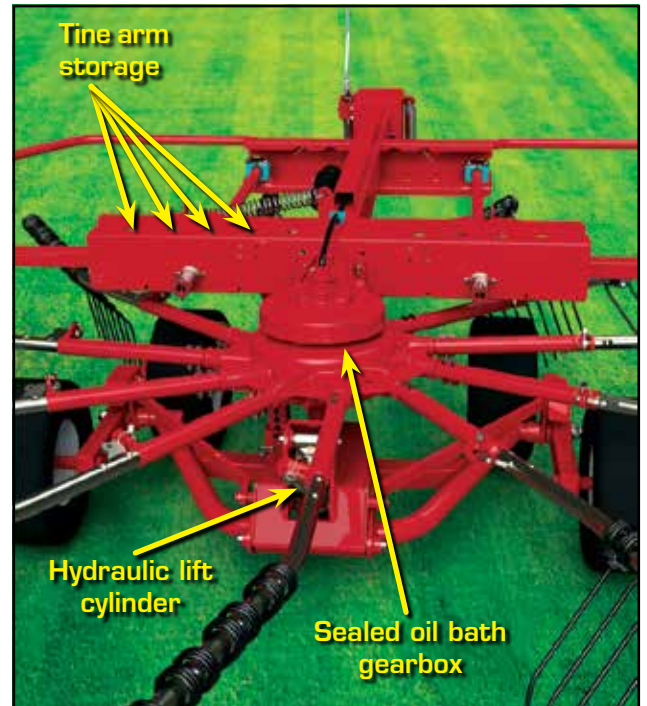

Tine arm storage


Hydraulic lift cylinder

Sealed oil bath gearbox

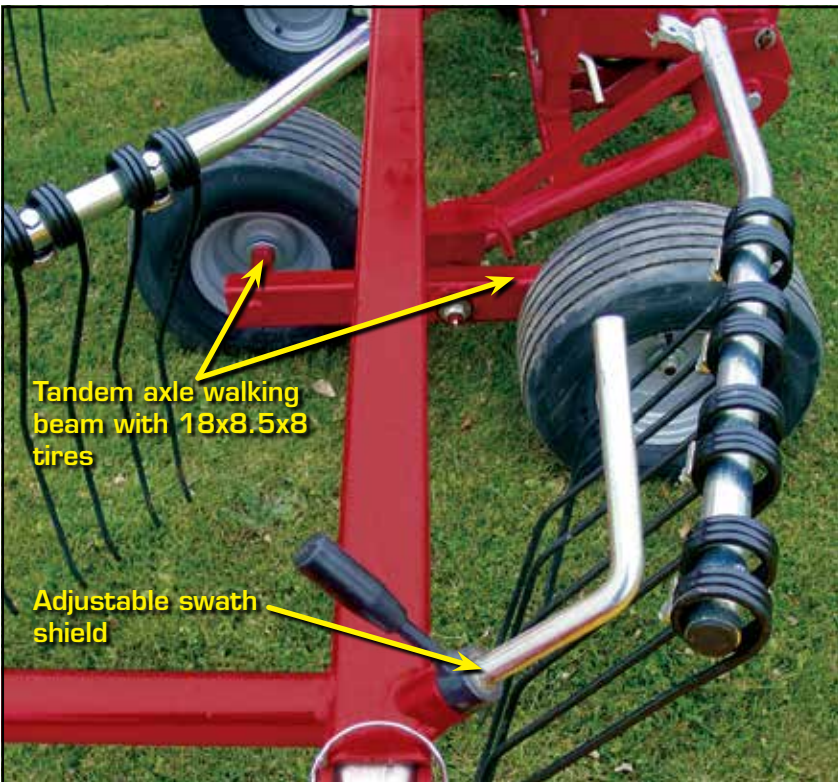

Tandem axle walking beam with 18x8.5x8 tires

Adjustable swath shield

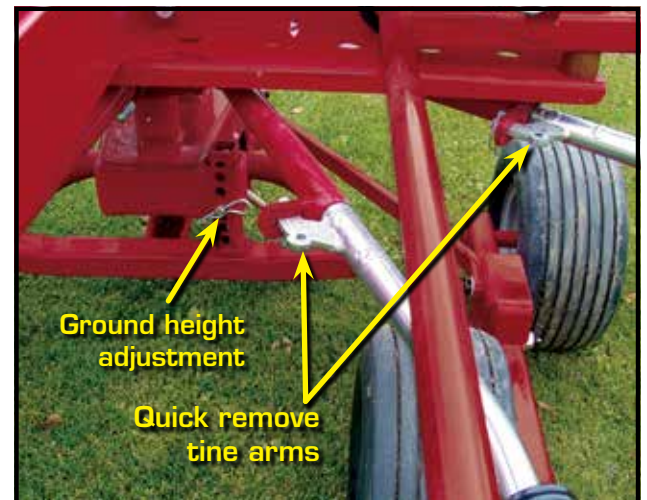

Ground height adjustment

Quick remove tine arms

ROTARY RAKES

Effective 7-23



Rotary Rake

- ❖ 11 Arms
- ❖ Hydraulic Cylinder Lift w/Hoses
- ❖ Adjustable Front Cylinder for Leveling Rake
- ❖ Tandem Offset Axles w/(4) 18/8.5 x 8 Tires

BASE UNIT

- ❖ Sealed Oil Bath Gearbox
- ❖ 11' 2" Working Width
- ❖ 540 RPM Constant Velocity PTO w/Slip Clutch
- ❖ Adjustable Swath Shield
- ❖ Quick-Remove Tine Arms
- ❖ Jack

Item #	Description	List Price
RR420	Rotary Rake	\$13,733



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.