



Prices Effective as of 3-22

SEMI-INDUSTRIAL DOUBLE AUGER SNOWBLOWER




Sub-Frame with drivetrain and interface for installation on front of tractor



Configuration	VAT WIDTH	VAT HEIGHT	DRUM DIAMETER	AUGER DIAMETER	FAN DIAMETER	DRUM DEPTH	RPM	APPROX. WEIGHT	AGRICULTURAL		INDUSTRIAL
									S-250 MODEL	SUB-FRAME	S-250 MODEL
Mechanical	50.75 in	37.5 in	24 in	16 in	24 in	9 in	540-680	1 185 lb	17 600 \$	11 750 \$	17 600 \$
3500 psi Hydraulic	50.75 in	37.5 in	24 in	16 in	24 in	9 in	540-680	1 300 lb			20 600 \$
6000 psi Hydraulic	50.75 in	37.5 in	24 in	16 in	24 in	9 in	540-680	1 300 lb			27 00 \$

OPTIONS	AGRICULTURAL		INDUSTRIAL
	T50 PTO DRIVESHAFT FOR REAR INSTALLATION	585 \$	
SKID STEER ATTACHMENT		1 550 \$	
CAMELEON ATTACHMENT		2 350 \$	
3000 PSI HYDRAULIC CONVERSION for MECHANICAL SNOWBLOWER	2 000 \$	2 000 \$	
CUTTING EDGE AND SKID SHOE OPTIONS			
4"(total) EXTENSIONS KIT	550 \$	550 \$	
8"(total) EXTENSIONS KIT	640 \$	640 \$	
TELESCOPIC CHUTE (32" extension)	3 800 \$	3 800 \$	
FIRST ELECTRO-HYDRAULIC VALVE KIT (solenoid)	+ 865 \$ for first	+ 865 \$ for first	
ELECTRO-HYDRAULIC VALVE KIT (solenoid) - EACH ADDITIONAL	+ 545 for each added	+ 545 for each added	

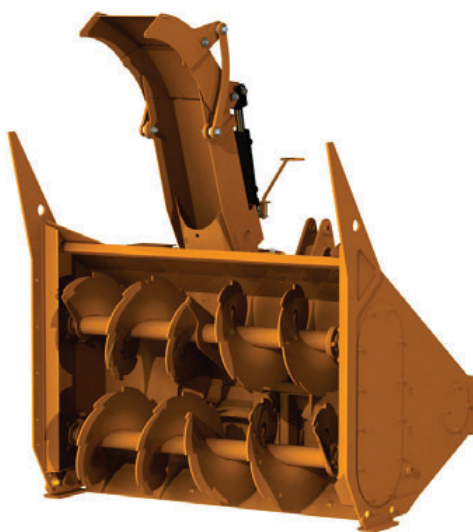

Mechanical S-250HD model



S-250HS Cameleon model



Telescopic Chute



S-250HS Skid Steer model

