

## CHISEL PLOWS (Primary Tillage)

# ATHENS

## MODEL 156



*The Model 156 Chisel Plow has the quality and performance you are looking for in a chisel plow.*



"WE PLOW THE EARTH"

*Designed for primary tilling, breaking hard pan for water filtration, plowing heavy crop stubble, or fallow plowing. Available in 3-point-lift models with plowing widths ranging from 5' to 16'. The 156 features rigid or spring mounted tines with 26" or 32" clearance. They can be equipped with a variety of ground engaging tools.*

[www.athensplowcompany.com](http://www.athensplowcompany.com)

# CHISEL PLOWS (Primary Tillage)

## STANDARD EQUIPMENT

- Tine Size – See Optional Equipment
- Tine Spacing - 12"
- Chisel Points - 5/8"
- Clearance, Frame to Point - 26" or 32"
- 2 Bar Extension Widths - 2' or 4'
- 3 Bar Extension Widths - 2', 4', or 6'
- Hitch – Category I, II, or III

## OPTIONAL EQUIPMENT

- Tines:  
1" x 2" x 26"  
1" x 2" x 32"  
1.25" x 2" x 32"
- Rigid or Spring Tine Attaching

## EXTRA EQUIPMENT

- 3/8" Twisted Shovel
- 2' or 4' Extensions - 2 Bar Units
- 2', 4', or 6' Extensions - 3 Bar Units
- 15" Gauge Wheels, Adjustable
- Quick Coupler Adaptors - Category II & III

## MODEL I 56 SPECIFICATIONS

NUMBER OF TINES	TINE SPACING	EXTENSION WIDTHS	*APPROX WEIGHT (lbs)	**APPROX HP
<b>2 BAR BASE</b>				
5	12"	2' or 4'	737	50-60
7	12"	2' or 4'	1,001	70-85
11	12"	2' or 4'	1,573	110-130
<b>3 BAR BASE</b>				
7	12"	2', 4', or 6'	1,208	70-85
10	12"	2', 4', or 6'	1,628	100-120

\*Approximate weight calculated using Spring Tine Attachment with 32" Tines and no Extensions.  
 \*\*Approximate horsepower (HP) is only given as a guide. Extremely hard, soft, hilly, or boggy conditions will change these figures.


## FEATURES

### FRAME

The Heavy Duty Frame is constructed of structural 4" x 4" steel tubing welded into a unitized one-piece frame. All high stress areas are reinforced to resist bending and twisting.

### TINE SPACING

Tines are mounted 24" apart on the 2 Bar units and 36" apart on the 3 Bar units. Then they are staggered from front to rear with a spacing from the center of the unit yielding a 12" pattern.

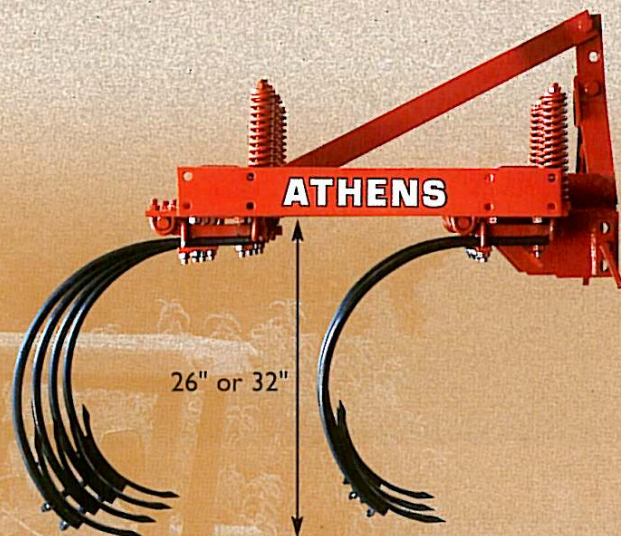

### VERTICAL CLEARANCE

The Vertical Clearance between the chisel point and the bottom of the frame is 26" or 32" depending on the tine size.



### SPRING TINE PIVOT ASSEMBLIES

Spring Tine Pivot Assemblies feature dual springs made of 1/2" oil tempered steel for strength and durability. The spring mounts are cast with internal and external helicals that match the ends of the springs. As the spring is stressed, the load is distributed evenly out the entire length of the spring to avoid stress concentrations.

### THE RIGID TINE PIVOT ASSEMBLIES

Rigid Tine Pivot Assemblies are used where rocks are not a problem. Available on 5' and 7' 2-Bar units only.


Athens Plow Co., Inc. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified. Athens Plow Co., Inc. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.

# CHISEL PLOWS (Primary Tillage)

Prices Effective as of 8-22



## ATHENS 156 MOUNTED CHISEL PLOW

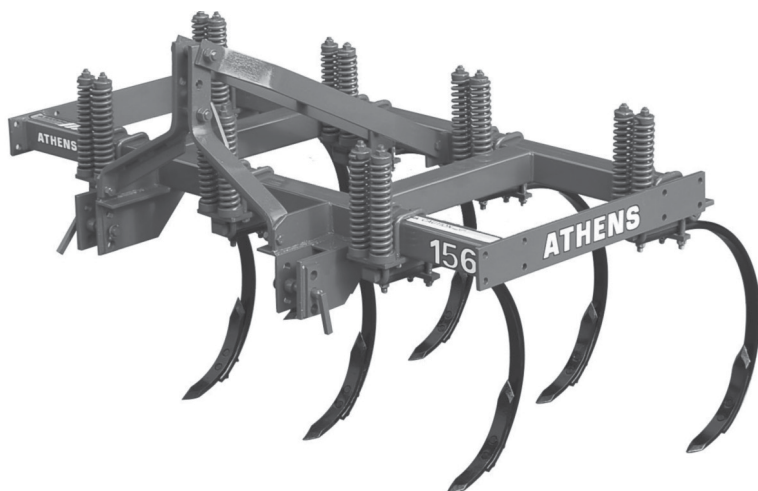

### SPECIFICATIONS:

Lift Type – 5', 7', 10', 11' Bases  
2 Bar Lift Type – 5' to 15'  
3 Bar Lift Type – 7' to 16'  
1" x 2" x 26", 1" x 2" x 32" &  
1-1/4" x 2" x 32" Alloy Steel Tines  
5/8" Chisel Points or  
3/8" Twisted Shovels

### STANDARD EQUIPMENT

Cushion Spring Clamps  
4 x 4 Tubular Frame  
12" Tine Spacing

MODEL NUMBER	TINE ATTCH- MENT	SIZE TINE			SIZE (CAT) HITCH	APX WT	SUGST PRICE
		1 X 26	1 X 32	1.25 X 32			
<u>5'0" WIDE</u>		<u>W/RIGID TINE ATTACHMENT, 26" TINES &amp; 5/8" POINTS</u>					
156-0521-221	RGD	X			I	580	\$2,122.80
156-0521-222	RGD	X			II	580	\$2,122.80
<u>7'0" WIDE</u>		<u>W/RIGID TINE ATTACHMENT, 26" TINES &amp; 5/8" POINTS</u>					
156-0721-223	RGD	X			II	732	\$2,847.60
		<u>2 – BAR LIFT TYPE W/SPRING TINE ATTACHMENT &amp; 5/8" POINTS</u>					
<u>5'0" WIDE</u>		<u>W/CATEGORY I OR II HITCH PINS</u>					
156-0522-221	SPG	X			I	736	\$3,244.80
156-0522-321	SPG		X		I	766	\$3,348
156-0522-421	SPG			X	I	822	\$3,650.40
156-0522-222	SPG	X			II	737	\$3,244.80
156-0522-322	SPG		X		II	767	\$3,348
156-0522-422	SPG			X	II	822	\$3,650.40
<u>7'0" WIDE</u>		<u>W/CATEGORY II HITCH PINS</u>					
156-0722-223	SPG	X			II	952	\$3,962.40
156-0722-323	SPG		X		II	994	\$4,107.60
156-0722-423	SPG			X	II	1001	\$4,531.20
<u>11'0" WIDE</u>		<u>W/CATEGORY II HITCH PINS</u>					
156-1122-223	SPG	X			II	1243	\$5,725.20
156-1122-323	SPG		X		II	1452	\$5,960.40
156-1122-423	SPG			X	II	1573	\$6,622.80



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# CHISEL PLOWS (Primary Tillage)

Prices Effective as of 8-22



MODEL NUMBER	TINE	TINE SIZE			SIZE	APX	SUGST
	ATTCH MENT	1 X 26	1 X 32	1.25 X 32	(CAT) HITCH	WT	PRICE
	*** SINGLE EXTENSION FOR TWO-BAR UNITS*** W/ 5/8" CHISEL POINTS				(SINGLE EXTENSIONS ARE COMPLETE)		
2'0"							
9-156-022122	RGD	X			N/A	198	\$573.60
9-156-022222	SPG	X			N/A	198	\$943.20
9-156-022232	SPG		X		N/A	210	\$996
9-156-022242	SPG			X	N/A	232	\$1,107.60
	***DOUBLE EXTENSION FOR TWO-BAR UNITS*** W/ 5/8" CHISEL POINTS				(USED ONLY WITH SINGLE EXTENSIONS)		
2'0"							
9-156-042122	RGD	X			N/A	253	\$ 711.60
9-156-042222	SPG	X			N/A	253	\$ 1,178.40
9-156-042232	SPG		X		N/A	265	\$1,202.40
9-156-042242	SPG			X	N/A	287	\$1,341.60
3-BAR W/SPRING TINE ATTACHMENT & 5/8" POINTS							
7'0" WIDE		W/CATEGORY II HITCH					
156-0732-223	SPG	X			II	1089	\$4,588.80
156-0732-323	SPG		X		II	1131	\$4,740
156-0732-423	SPG			X	II	1208	\$5,157.60
10'0" WIDE		W/CATEGORY II-III HITCH					
156-1032-223	SPG	X			II & III	1458	\$5,977.20
156-1032-323	SPG		X		II & III	1518	\$6,182.40
156-1032-423	SPG			X	II & III	1628	\$6,798
	***SINGLE EXTENSION FOR THREE BAR UNITS*** W/ 5/8 CHISEL POINTS				(SINGLE EXTENSIONS ARE COMPLETE)		
2'0"							
9-156-023222	SPG	X			N/A	199	\$954
9-156-023232	SPG		X		N/A	211	\$1,000.80
9-156-023242	SPG			X	N/A	233	\$1,119.60
	***DOUBLE EXTENSION FOR THREE-BAR UNITS*** W/ 5/8" CHISEL POINTS				(USED ONLY WITH SINGLE EXTENSIONS)		
2'0"							
9-156-043222	SPG	X			N/A	268	\$1,162.80
9-156-043232	SPG		X		N/A	280	\$1,203.60
9-156-043242	SPG			X	N/A	302	\$1,285.20



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# CHISEL PLOWS (Primary Tillage)

Prices Effective as of 8-22



<u>MODEL NUMBER</u>	<u>TINE ATTCH MENT</u>	<u>TINE SIZE</u>			<u>SIZE (CAT) HITCH</u>	<u>APX WT</u>	<u>SUGST PRICE</u>
	<u>1 X 26</u>	<u>1 X 32</u>	<u>1.25 X 32</u>				
***TRIPLE EXTENSION FOR THREE-BAR UNITS*** <u>W/ 5/8” CHISEL POINTS</u>					(TRIPLE EXTENSIONS ARE COMPLETE)		
<u>6’0”</u>							
9-156-063222	SPG	X			N/A	770	\$3,475.20
9-156-063232	SPG		X		N/A	806	\$3,609.60
9-156-063242	SPG			X	N/A	872	\$3,962.40

## EXTRA EQUIPMENT

		<u>APX WT</u>	<u>SUGST PRICE</u>
9-156-520516	GAUGE WHEELS (2 BAR UNITS ONLY) 2-15 WHEELS LESS TIRES	167#	\$985.20
9-156-530516	GAUGE WHEELS (3 BAR UNITS ONLY) 2-15 WHEELS LESS TIRES	169#	\$999.60
101733	CAT II & III QUICK COUPLER ADAPTER FOR 10' UNITS	7#	\$ 109.20
101746	CAT II QUICK COUPLER ADAPTER FOR 7' UNITS AND 11' UNITS	1#	\$ 46.80

\*\*\*WHEN ORDERING EXTENSIONS: SINGLE EXTENSIONS ARE COMPLETE AND CAN BE USED ALONE.  
DOUBLE EXTENSIONS ARE NOT COMPLETE AND MUST BE USED ONLY WITH SINGLE EXTENSIONS  
TRIPLE EXTENSIONS ARE COMPLETE AND CAN BE USED ALONE.

## OPTIONAL EQUIPMENT:

For 3/8 Twisted Shovels, Change the 9<sup>th</sup> digit from 2 to 3, add 1# each and \$7.20 each to weights and prices for units with 5/8" Chisel Points shown on price list.



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.