


Operator Instructions
SADDLES, STRAPS, AND POLYETHYLENE TANKS
Assembly/Operation Instructions/Parts

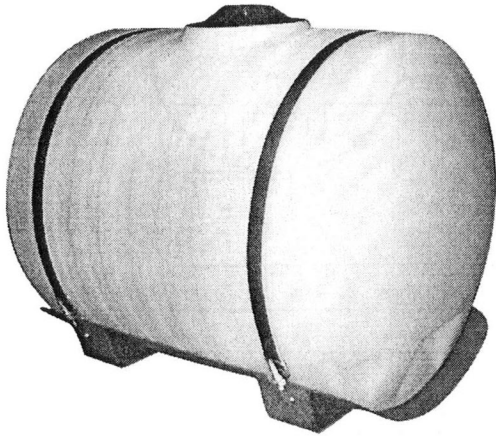

INSTALLATION INSTRUCTIONS

The tank must be installed on a smooth surface which adequately supports the tank.

Tank fittings should be tightened (if necessary) before filling the tank. The tightening of fittings on gaskets which have become wet with certain solutions can cause gaskets to deform and dislocate. If this should happen, it is necessary to dry the gasket completely before tightening the fitting.

The tank must be held securely in place by hold-down straps to keep the tank from shifting in its cradle.

The nylon straps are to be inserted in and out of the slots in the buckle as shown in diagram "A". Be sure the straps are snug before tightening the hook bolts. In most cases it will be necessary to retighten the straps after filling the tank with solution.

CARE AND MAINTENANCE

WARNING: Do not use the tank as a container for fuel oils, kerosene, gasoline, or any other petroleum distillate product. All polyolefins are softened and permeated by such products. In an enclosed area the vaporization of these materials from the outside surface of the tank could create a dangerous condition.

The tank should not be used as a pressure vessel nor used with chemicals or solutions having a weight of more than 12 pounds per gallon.

Store the tank in a dry dark place when not in use. Storage out of sunlight will prolong the life of the tank.

Do not drop, strike, or kick the tank at low temperatures. Tanks become brittle and are subject to cracking at temperature below 20° Fahrenheit.

Always flush the tank with water and a neutralizing agent (Such as Nutra-Sol) at the end of each use to prevent contamination of solutions.

