

# PULVI-MULCHER/SEEDBED MAKER

Prices Effective as of 1-24

## Pulvi-Mulcher

ML Models - 12'6", 13'10", 15'2" & 18'9"



Model MCL-2253 Shown with Standard Equipment

The ML Series Pulvi-Mulcher features a larger frame and 20" ductile iron roller wheels. The larger diameter rollers firm and level the seedbed to ensure uniform seed germination and improve planter operation. Working widths of the ML Series fit into mid-size operations. Choice of wheels and cultivator teeth allow the ML Pulvi-Mulcher to be custom configured to meet the needs of the producer.

### STANDARD MACHINE SPECIFICATIONS

Transport Height - 3'8"	4" Roller Axles	Dual Transport Wheels
Transport Length - 19'10"	Nominal Teeth Spacing - 6"	(4) 9.5L x 15-8 Ply Tires
20" Notched Ductile Iron Wheels	Maximum Tooth Depth of Operation - 6"	LED Warning Lights & SMV Emblem
20" Crowfoot Ductile Iron Wheels	Independent Hydraulic Tooth Control	Safety Chain Kit
Rear Scrapers - Standard on Notched Rollers	S-Tine Models: 1 3/8" Points Standard	Powder Coat Paint

Horsepower Requirements: 6 to 8 HP per Foot

Approximate Set-Up Time: 12 Hours

### PRICING INFORMATION

Model Number	Working Width	Transport Width	Front Roller Type	Rear Roller Type	Number of Teeth	Approximate Weight	Suggested List Price
CONVENTIONAL "C" TEETH							
ML-1483	12'6"	13'6"	20" Notched	20" Notched	23	6,314 lbs.	\$ 33,345.00
ML-1643	13'10"	14'5"	20" Notched	20" Notched	27	6,666 lbs.	34,800.00
ML-1803	15'2"	15'9"	20" Notched	20" Notched	29	7,015 lbs.	36,154.00
ML-2253	18'9"	19'6"	20" Notched	20" Notched	35	8,313 lbs.	42,282.00
MCL-1483	12'6"	13'6"	20" Crowfoot	20" Notched	23	6,184 lbs.	33,249.00
MCL-1643	13'10"	14'5"	20" Crowfoot	20" Notched	27	6,454 lbs.	34,669.00
MCL-1803	15'2"	15'9"	20" Crowfoot	20" Notched	29	6,882 lbs.	36,128.00
MCL-2253	18'9"	19'6"	20" Crowfoot	20" Notched	35	8,175 lbs.	42,045.00
MLC-1483	12'6"	13'6"	20" Notched	20" Crowfoot	23	6,151 lbs.	32,706.00
MLC-1643	13'10"	14'5"	20" Notched	20" Crowfoot	27	6,382 lbs.	34,011.00
MLC-1803	15'2"	15'9"	20" Notched	20" Crowfoot	29	6,718 lbs.	35,372.00
MLC-2253	18'9"	19'6"	20" Notched	20" Crowfoot	35	7,986 lbs.	41,266.00
MCC-1483	12'6"	13'6"	20" Crowfoot	20" Crowfoot	23	6,078 lbs.	32,756.00
MCC-1643	13'10"	14'5"	20" Crowfoot	20" Crowfoot	27	6,215 lbs.	33,896.00
MCC-1803	15'2"	15'9"	20" Crowfoot	20" Crowfoot	29	6,586 lbs.	35,346.00
MCC-2253	18'9"	19'6"	20" Crowfoot	20" Crowfoot	35	7,879 lbs.	41,059.00
12 MM S-TINE TEETH WITH CHOICE OF 2J149 OR 2J150 POINTS							
MLS-1483	12'6"	13'6"	20" Notched	20" Notched	23	6,255 lbs.	33,478.00
MLS-1643	13'10"	14'5"	20" Notched	20" Notched	27	6,545 lbs.	34,929.00
MLS-1803	15'2"	15'9"	20" Notched	20" Notched	29	6,737 lbs.	36,286.00
MLS-2253	18'9"	19'6"	20" Notched	20" Notched	35	8,223 lbs.	42,413.00
MCLS-1483	12'6"	13'6"	20" Crowfoot	20" Notched	23	6,126 lbs.	33,383.00
MCLS-1643	13'10"	14'5"	20" Crowfoot	20" Notched	27	6,421 lbs.	34,802.00
MCLS-1803	15'2"	15'9"	20" Crowfoot	20" Notched	29	6,605 lbs.	36,259.00
MCLS-2253	18'9"	19'6"	20" Crowfoot	20" Notched	35	8,086 lbs.	42,179.00
MLCS-1483	12'6"	13'6"	20" Notched	20" Crowfoot	23	6,020 lbs.	32,839.00
MLCS-1643	13'10"	14'5"	20" Notched	20" Crowfoot	27	6,304 lbs.	34,142.00
MLCS-1803	15'2"	15'9"	20" Notched	20" Crowfoot	29	6,441 lbs.	35,502.00
MLCS-2253	18'9"	19'6"	20" Notched	20" Crowfoot	35	7,896 lbs.	41,397.00
MCCS-1483	12'6"	13'6"	20" Crowfoot	20" Crowfoot	23	5,890 lbs.	32,887.00
MCCS-1643	13'10"	14'5"	20" Crowfoot	20" Crowfoot	27	6,137 lbs.	34,028.00
MCCS-1803	15'2"	15'9"	20" Crowfoot	20" Crowfoot	29	6,310 lbs.	35,480.00
MCCS-2253	18'9"	19'6"	20" Crowfoot	20" Crowfoot	35	7,789 lbs.	41,192.00

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.

Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.


Secondary Tillage

# PULVI-MULCHER/SEEDBED MAKER

Prices Effective as of 1-24

## Pulvi-Mulcher

WL Models - 21'8" & 25'

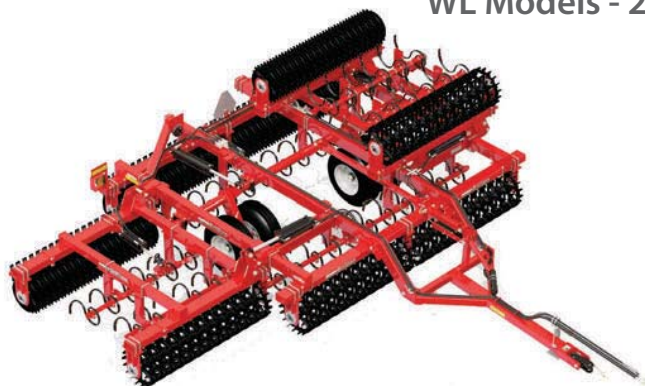

Model WCLS-3003 Shown with Standard Equipment

The WL Series of Pulvi-Mulchers offers larger model sizes that can cover more acres more efficiently. These models are flat folding units for a very manageable transport width and height. Choice of Notched or Crowfoot Ductile Iron wheels and the choice of s-tines or c-tines allow the WL Series to be customized to meet the needs of any operation.

Secondary Tillage

### STANDARD MACHINE SPECIFICATIONS

Transport Height - 6'2"	4" Roller Axles	S-Tine Models: 1 3/8" Points Standard
Transport Length - 19'10"	Nominal Teeth Spacing - 6"	Dual Transport Wheels
20" Notched Ductile Iron Wheels	Maximum Tooth Depth of Operation - 6"	(4) 11L x 15-12 Ply Tires
20" Crowfoot Ductile Iron Wheels	Independent Hydraulic Tooth Control	LED Warning Lights & SMV Emblem
Rear Scrapers - Standard on Notched Rollers	Cylinders and Hoses	Safety Chain Kit
Powder Coat Paint		

Horsepower Requirements: 6 to 8 HP per Foot

Approximate Set-Up Time: 30 Hours

### PRICING INFORMATION

Model Number	Working Width	Transport Width	Front Roller Type	Rear Roller Type	Number of Teeth	Approximate Weight	Suggested List Price
CONVENTIONAL "C" TEETH							
WL-2603	21'8"	13'11"	20" Notched	20" Notched	41	10,760 lbs.	\$ 62,017.00
WL-3003	25'0"	13'11"	20" Notched	20" Notched	47	11,585 lbs.	65,437.00
WLC-2603	21'8"	13'11"	20" Notched	20" Crowfoot	41	10,406 lbs.	60,866.00
WLC-3003	25'0"	13'11"	20" Notched	20" Crowfoot	47	11,462 lbs.	64,153.00
WCL-2603	21'8"	13'11"	20" Crowfoot	20" Notched	41	10,605 lbs.	61,819.00
WCL-3003	25'0"	13'11"	20" Crowfoot	20" Notched	47	11,235 lbs.	65,262.00
WCC-2603	21'8"	13'11"	20" Crowfoot	20" Crowfoot	41	10,251 lbs.	60,666.00
WCC-3003	25'0"	13'11"	20" Crowfoot	20" Crowfoot	47	11,112 lbs.	64,068.00
12 MM S-TINE TEETH WITH CHOICE OF 2J149 OR 2J150 POINTS							
WLS-2603	21'8"	13'11"	20" Notched	20" Notched	41	10,684 lbs.	62,142.00
WLS-3003	25'0"	13'11"	20" Notched	20" Notched	47	11,499 lbs.	65,978.00
WLCS-2603	21'8"	13'11"	20" Notched	20" Crowfoot	41	10,330 lbs.	60,969.00
WLCS-3003	25'0"	13'11"	20" Notched	20" Crowfoot	47	11,376 lbs.	64,250.00
WCLS-2603	21'8"	13'11"	20" Crowfoot	20" Notched	41	10,530 lbs.	62,205.00
WCLS-3003	25'0"	13'11"	20" Crowfoot	20" Notched	47	11,149 lbs.	65,542.00
WCCS-2603	21'8"	13'11"	20" Crowfoot	20" Crowfoot	41	10,176 lbs.	60,972.00
WCCS-3003	25'0"	13'11"	20" Crowfoot	20" Crowfoot	47	11,026 lbs.	65,323.00

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# PULVI-MULCHER/SEEDBED MAKER

Prices Effective as of 1-24

## *Pulvi-Mulcher* Accessories and Optional Equipment

### For ML Models

Part Number	Description	Approximate Weight	Suggested List Price
<b>POINTS</b>			
2J149	1 3/8" Heavy-Duty Reversible S-Tine Point with Hardware*	1.0 lb.	In Base Price
2J150	2 3/4" Shovel with Hardware for S-Tines*	1.0 lb.	ADD \$ 7.00 Each
<b>OPTIONAL EQUIPMENT</b>			
1K083	Front Scraper Kit for 12'6" Models (For Notched Rollers)	108.0 lbs.	1,149.00
1K084	Front Scraper Kit for 13'10" Models (For Notched Rollers)	118.0 lbs.	1,235.00
1K085	Front Scraper Kit for 15'2" Models (For Notched Rollers)	129.0 lbs.	1,495.00
1K974	Front Scraper Kit for 18'9" Models (For Notched Rollers)	159.0 lbs.	1,572.00
8J141	Land Leveler Kit for 12'6" Models	105.0 lbs.	657.00
8J140	Land Leveler Kit for 13'10" Models	127.0 lbs.	773.00
8J139	Land Leveler Kit for 15'2" Models	134.0 lbs.	801.00
1K973	Land Leveler Kit for 18'9" Models	169.0 lbs.	1,016.00
3K692	V-Leveler Kit for 12'6" Models	196.0 lbs.	1,527.00
3K691	V-Leveler Kit for 13'10" & 15'2" Models	221.0 lbs.	1,632.00
3K690	V-Leveler Kit for 18'9" Models	240.0 lbs.	1,665.00
8J127	Rear Hitch	74.0 lbs.	465.00

\* 2J149 - 1 3/8" Heavy-Duty Reversible Points are Standard Equipment on Models Equipped with S-Tines and are Included in the Base Price of the Machine; if 2J150 - 2 3/4" Shovels are Desired, Add \$7.00 Each. **Please Specify 2J149 or 2J150 when placing order.**

### For WL Models

Part Number	Description	Approximate Weight	Suggested List Price
<b>POINTS</b>			
2J149	1 3/8" Heavy-Duty Reversible S-Tine Point with Hardware*	1.0 lb.	In Base Price
2J150	2 3/4" Shovel with Hardware for S-Tines*	1.0 lb.	ADD \$ 7.00 Each
<b>OPTIONAL EQUIPMENT</b>			
1K086	Front Scraper Kit for 21'8" Models (For Notched Rollers)	210.0 lbs.	2,071.00
1K087	Front Scraper Kit for 25' Models (For Notched Rollers)	236.0 lbs.	2,301.00
8J702	Land Leveler Kit for 21'8" Models	203.0 lbs.	1,199.00
8J703	Land Leveler Kit for 25' Models	213.0 lbs.	1,329.00
177536	V-Leveler Kit for 21'8" Models	317.0 lbs.	2,346.00
177537	V-Leveler Kit for 25' Models	328.0 lbs.	2,402.00
8J709	Rear Hitch for 21'8" and 25' Models	95.0 lbs.	487.00
9K446	Hydraulic Conversion Kit For Independent Wing Control	16.0 lbs.	294.00
202528	C-Tooth to S-Tine Conversion Kit for 21'8" Models	489.0 lbs.	5,180.00
202529	C-Tooth to S-Tine Conversion Kit for 25' Models	541.0 lbs.	5,674.00
202530	S-Tine to C-Tooth Conversion Kit for 21'8" Models	603.0 lbs.	6,059.00
202531	S-Tine to C-Tooth Conversion Kit for 25' Models	671.0 lbs.	6,976.00

\* 2J149 - 1 3/8" Heavy-Duty Reversible Points are Standard Equipment on Models Equipped with S-Tines and are Included in the Base Price of the Machine; if 2J150 - 2 3/4" Shovels are Desired, Add \$7.00 Each **Please Specify 2J149 or 2J150 when placing order.**

**Secondary Tillage**



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# PULVI-MULCHER/SEEDBED MAKER

Prices Effective as of 1-24

## Pulvi-Mulcher

WL Models - 30'



Model WL-360 Shown with Standard Equipment

With a working width of 30 feet and an operating weight in excess of 13,000 lbs., these WL Pulvi-Mulcher models provide the ultimate in high capacity seedbed preparation. These units are flat folding for a very manageable transport width and height. Choice of Notched or Crowfoot Ductile Iron wheels and choice of s-tines or c-tines allow these machines to be set up to match differing soil types.

### STANDARD MACHINE SPECIFICATIONS

Transport Height - 6'4"	4" Roller Axles	Dual Transport Wheels
Transport Length - 19'10"	Nominal Teeth Spacing - 6"	(4) 12.5L x 16-14 Ply Tires
20" Notched Ductile Iron Wheels	Maximum Tooth Depth of Operation - 6"	LED Warning Lights & SMV Emblem
20" Crowfoot Ductile Iron Wheels	Independent Hydraulic Tooth Control	Safety Chain Kit
Rear Scrapers - Standard on Notched Rollers	S-Tine Models: 1 3/8" Points Standard	Powder Coat Paint

Horsepower Requirements: 6 to 8 HP per Foot

Approximate Set-Up Time: 40 Hours

### PRICING INFORMATION

Model Number	Working Width	Transport Width	Front Roller Type	Rear Roller Type	Number of Teeth	Approximate Weight	Suggested List Price
CONVENTIONAL "C" TEETH							
WL-360	30'	16'9"	20" Notched	20" Notched	59	15,453 lbs.	\$ 80,038.00
WLC-360	30'	16'9"	20" Notched	20" Crowfoot	59	14,836 lbs.	78,609.00
WCL-360	30'	16'9"	20" Crowfoot	20" Notched	59	15,189 lbs.	80,005.00
WCC-360	30'	16'9"	20" Crowfoot	20" Crowfoot	59	14,572 lbs.	78,576.00
12 MM S-TINE TEETH WITH CHOICE OF 2J149 OR 2J150 POINTS							
WLS-360	30'	16'9"	20" Notched	20" Notched	59	15,377 lbs.	80,155.00
WLCS-360	30'	16'9"	20" Notched	20" Crowfoot	59	13,961 lbs.	78,729.00
WCLS-360	30'	16'9"	20" Crowfoot	20" Notched	59	14,313 lbs.	80,127.00
WCCS-360	30'	16'9"	20" Crowfoot	20" Crowfoot	59	13,697 lbs.	78,698.00

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.

### ACCESSORIES & OPTIONAL EQUIPMENT

Part Number	Description	Approximate Weight	Suggested List Price
2J149	1 3/8" Heavy-Duty Reversible S-Tine Point with Hardware*	1.0 lb.	In Base Price
2J150	2 3/4" Shovel with Hardware for S-Tines*	1.0 lb.	ADD \$ 7.00 Each
3K028	S-Tine Shank, Clamp & Hardware	9.0 lbs.	67.00
9J619	Front Scraper Kit for 30' Models (For Notched Rollers)	373.0 lbs.	2,836.00
9J614	Land Leveler Kit for 30' Models	425.0 lbs.	1,957.00
177563	V-Leveler Kit for 30' Models	445.0 lbs.	2,666.00
9J545	Rear Hitch Kit	156.0 lbs.	1,041.00

\* 2J149 - 1 3/8" Heavy-Duty Reversible Points are Standard Equipment on Models Equipped with S-Tines and are Included in the Base Price of the Machine; if 2J150 - 2 3/4" Shovels are Desired, Add \$7.00 Each. **Please Specify 2J149 or 2J150 when placing order.**



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# PULVI-MULCHER/SEEDBED MAKER

Prices Effective as of 1-24

## Pulvi-Mulcher

3620 Models - 21'



Model WL-3620-21 Shown with Standard Equipment

The 3620 Series Pulvi-Mulcher, a two-section folding unit, features taller and stronger two-piece s-tine shanks with additional clearance for improved residue flow through the machine. 8" roller axles with heavy-duty bearings improve reliability and reduce down time. The 21' model utilizes a hydraulic down pressure system for even machine weight distribution across the width of the machine. Choice of Notched, Crowfoot or Optimizer® Ductile Iron wheels allow machines to be matched to varying soil types.

### STANDARD MACHINE SPECIFICATIONS

Transport Height - 13'4"	3 Rows of Shanks - 18" Between Shanks	Dual Transport Wheels
Transport Width - 12'3"	Minimum of 24" Between Rows of Shanks	(4) 12.5L x 15 FI Tires
Overall Machine Length - 31'3"	Heavy-Duty Two-Piece S-Tine Shank (1 3/4" x 5/8")	Rear Scrapers - Standard on Notched Rollers
24" Notched Ductile Iron Wheels	2" Reversible Points	2 Row Coil Tine Harrow in Front of Rear Roller
8" Roller Axles	25" Under Frame Clearance	Cat. II, III or IV Hitch
61 mm Heavy-Duty Bearings	Hitch Floats 15 Degrees Up, 25 Degrees Down	LED Warning Lights & SMV Emblem
Nominal Shank Spacing - 6"	Wings Float 5 Degrees Down	Safety Chain Kit
Maximum Shank Operating Depth - 5"	Independent Hydraulic Tooth Depth Control	Powder Coat Paint

Horsepower Requirements: 10 to 14 HP per Foot

Approximate Set-Up Time: 50 Hours

### PRICING INFORMATION

Model Number	Working Width	Transport Width	Front Roller Type	Rear Roller Type	Number of Shanks	Approximate Weight	Suggested List Price
WLB-3620-21	21'	12'3"	24" Notched	24" Notched	42	21,353 lbs.	\$ 108,059.00

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.

### ACCESSORIES & OPTIONAL EQUIPMENT

Part Number	Description	Approximate Weight	Suggested List Price
185120	2" Reversible Point with Hardware	2.0 lbs.	In Base Price
181331	Two-Piece S-Tine Shank Assembly, Clamp & Hardware (Less Point)	26.0 lbs.	\$ 178.00
156949	Single Lip Cat. V Hitch*	44.0 lbs.	ADD 255.00
219116	Front Scraper Kit for 21' Model (For 24" Notched Rollers)	216.0 lbs.	1,778.00
203736	V-Leveler Kit for 21' Models	382.0 lbs.	2,369.00
203738	Rear Hitch Kit	477.0 lbs.	2,831.00

\* Please specify which hitch is needed when placing order. Cat. II, III or IV are included in the base price of the machine, see above for additional cost if Cat. V hitch is needed.

Secondary Tillage




Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.

# PULVI-MULCHER/SEEDBED MAKER

## Pulvi-Mulcher

Prices Effective as of 1-24

3631 Models - 25', 30' & 36'

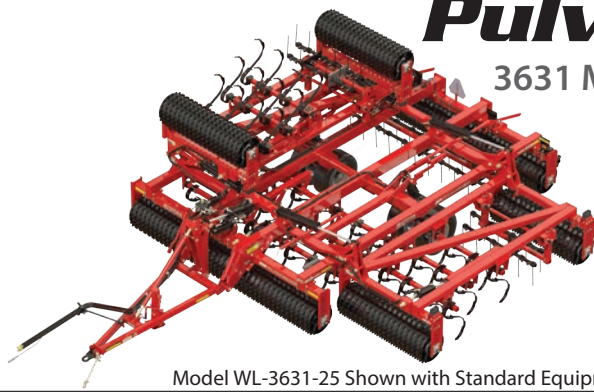

Model WL-3631-25 Shown with Standard Equipment

The 3631 Series Pulvi-Mulcher, three-section folding units available in 25', 30' and 36' working widths, feature heavy-duty s-tine shanks with additional clearance for improved residue flow through the machine. 8" roller axles with heavy-duty bearings improve reliability and reduce down time. Standard equipment includes wing hydraulic down pressure and a two-row coil tine harrow in front of the rear roller. The 3631 Series is offered with 24" Notched Ductile Iron wheels on the front and rear rollers.

### STANDARD MACHINE SPECIFICATIONS

Transport Height - 9'6" for 25' & 30'; 13'8" for 36'	Minimum of 24" Between Rows of Shanks	Dual Transport Wheels
Transport Width - See Below	Heavy-Duty Two-Piece S-Tine Shank (1 3/4" x 5/8")	(4) 380/55R16.5 Tires on 25' Model
Overall Machine Length - 29'	2" Reversible Points	(4) 480/45R17 Tires on 30' Model
24" Notched Ductile Iron Wheels	23" Under Frame Clearance	(4) 480/45R17 Tires on 36' Model
8" Roller Axles	Wing Hydraulic Down Pressure	Rear Scrapers - Standard on Notched Rollers
61 mm Heavy-Duty Bearings	Single Point Depth Control	2 Row Coil Tine Harrow in Front of Rear Roller
Nominal Shank Spacing - 6"	Transport Hitch Floats 25 Degrees Up and 17 Degrees Down	LED Warning Lights & SMV Emblem
Maximum Shank Operating Depth - 5"	Wings Float 6 Degrees Down	Safety Chain Kit
3 Rows of Shanks - 18" Between Shanks	Cat. III, IV or V Hitch	Powder Coat Paint

Horsepower Requirements: 10 to 14 HP per Foot

Approximate Set-Up Time: 70 to 90 Hours

### PRICING INFORMATION

Model Number	Working Width	Transport Width	Front Roller Type	Rear Roller Type	Number of Shanks	Approximate Weight	Suggested List Price
WLB-3631-25	25'	14'8"	24" Notched	24" Notched	49	25,002 lbs.	\$ 124,111.00
WLB-3631-30	30'	17'0"	24" Notched	24" Notched	59	27,870 lbs.	144,828.00
WLB-3631-36	36'	18'10"	24" Notched	24" Notched	71	32,784 lbs.	168,553.00

Ductile Iron Wheels Carry Five Year Limited Warranty Against Breakage.

### ACCESSORIES & OPTIONAL EQUIPMENT

Part Number	Description	Approximate Weight	Suggested List Price
185120	2" Reversible Point with Hardware	2.0 lbs.	In Base Price
181331	Two-Piece S-Tine Shank Assembly, Clamp & Hardware (Less Point)	26.0 lbs.	\$ 178.00
156949	Single Lip Cat. V Hitch*	44.0 lbs.	ADD 255.00
214038	Front Scraper Kit for 25' Model (For Notched Rollers)	265.0 lbs.	2,357.00
214039	Front Scraper Kit for 30' Model (For Notched Rollers)	298.0 lbs.	2,648.00
221578	Front Scraper Kit for 36' Model (For Notched Rollers)	366.0 lbs.	2,872.00
214021	Land Leveler Kit for 25' Model	545.0 lbs.	2,622.00
214022	Land Leveler Kit for 30' Model	581.0 lbs.	2,705.00
221592	Land Leveler Kit for 36' Model	668.0 lbs.	3,295.00
214023	V-Leveler Kit for 25' Model	511.0 lbs.	2,769.00
214024	V-Leveler Kit for 30' Model	547.0 lbs.	2,888.00
221591	V-Leveler Kit for 36' Model	678.0 lbs.	3,237.00
213907	Coil Tine Harrow Kit for 25' Model	2,520.0 lbs.	14,728.00
224174	Coil Tine Harrow Kit for 25' Model with Hydraulic Lift	2,699.0 lbs.	19,175.00
213908	Coil Tine Harrow Kit for 30' Model	2,672.0 lbs.	16,128.00
224175	Coil Tine Harrow Kit for 30' Model with Hydraulic Lift	2,853.0 lbs.	20,372.00
221599	Coil Tine Harrow Kit for 36' Model	2,839.0 lbs.	18,058.00
224176	Coil Tine Harrow Kit for 36' Model with Hydraulic Lift	3,022.0 lbs.	22,624.00
214025	Rear Hitch Kit	346.0 lbs.	2,477.00

\* Please specify which hitch is needed when placing order. Cat. III or Cat. IV are included in the base price of the machine, see above for additional cost if Cat. V hitch is needed.

Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.