

# MOUNTED HARROW


Available to LORENZ Dealers Only



# LORENZ

MANUFACTURING  
COMPANY

# MOUNTED HARROW

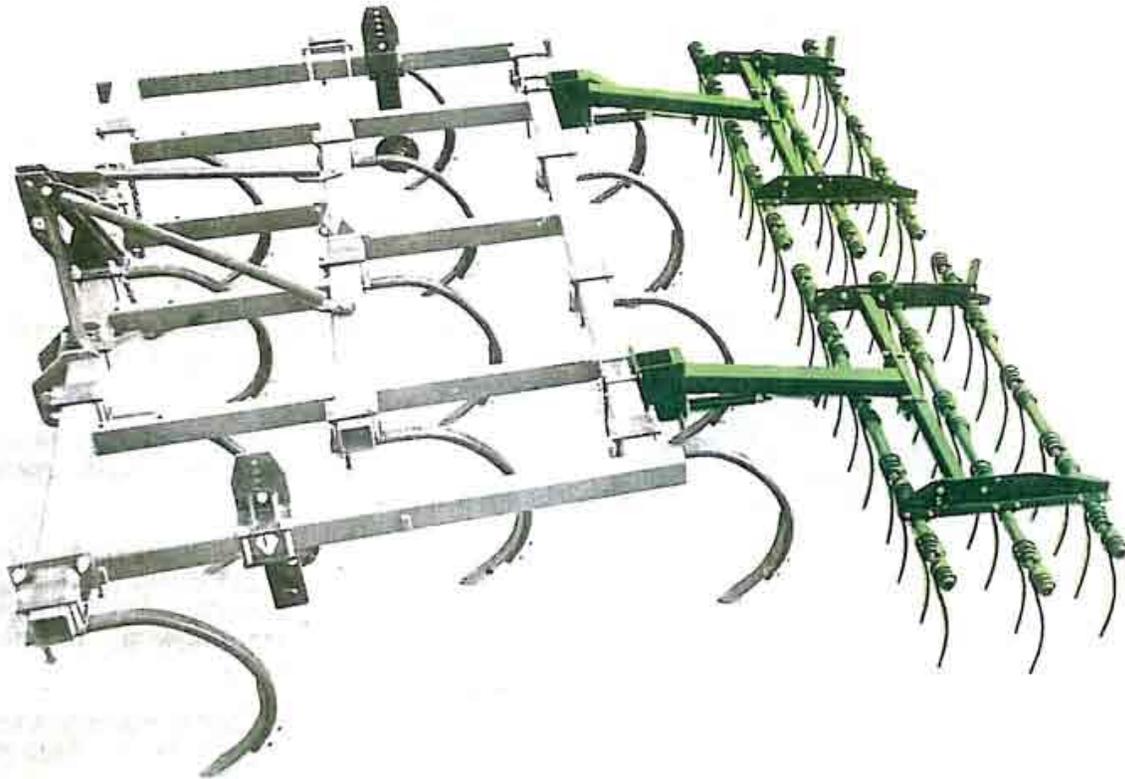

## STANDARD FEATURES

- \* LORENZ HARROW SECTIONS FIT MOST ALL FIELD CULTIVATORS AND CHISEL PLOWS.
- \* HARROW SECTIONS & DRAWBAR ARE FULLY ASSEMBLED AT THE FACTORY, NOT SHIPPED AS AN ERECTOR SET. THIS ELIMINATES ANY SHIPPING SHORTAGES AND MINIMIZES FIELD INSTALLATION TIME.
- \* AVAILABLE IN 4 DIFFERENT SIZE SECTIONS ALLOWING A BETTER FIT ON STRAIGHT OR FOLDING IMPLEMENTS.
- \* HEAVY DUTY DRAWBAR ARMS INSURE POSITIVE MOUNT TO IMPLEMENT. ARMS ARE SPRING LOADED AND ADJUSTABLE.
- \* HEAVY 3/8" CURVED HARROW TOOTH WITH BACK UP FEATURE.

 **GENERAL  
IMPLEMENT**  
DISTRIBUTORS

# MOUNTED HARROW

Available to LORENZ Dealers Only



# LORENZ



## MANUFACTURING COMPANY

**1** ANGLE ADJUSTMENTS OF THE HEAVY 3/8" CURVED TOOTH CAN BE MADE WITH ONE LEVER FOR ALL THREE BARS IN THE FIELD WITHOUT A WRENCH.

**2** THE HARROW SECTION CAN EASILY BE LEVELED BY CHANGING THE HOLE COMBINATION IN THE H-FRAME ASSEMBLY ACROSS THE TOP OF THE HARROW SECTION. ADJUSTMENTS FOR THE HEIGHT OF THE IMPLEMENT CAN ALSO BE MADE AT THE TOP OF THE HARROW ARM.

**3** THE BACK UP FEATURE OF THE HARROW TEETH ALLOWS BACKING WITHOUT RAISING THE HARROW. THIS FEATURE ALSO PREVENTS TOOTH BREAKAGE WHEN MAKING SHORT TURNS IN THE FIELD WITH THE HARROW DOWN.

**4** POSITIVE SQUARE ON SQUARE MOUNTING IS USED ON BOTH ENDS OF THE HARROW ARM FOR A SOLID POSITIVE MOUNT.

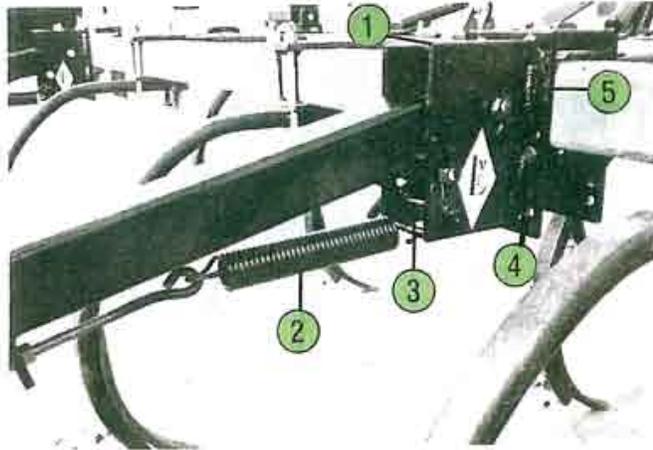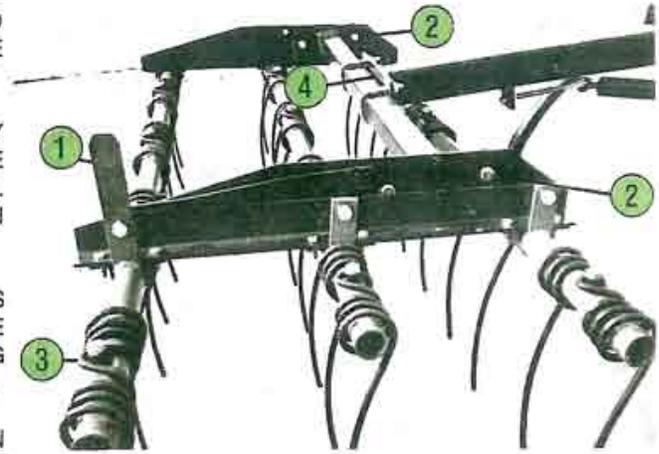

**1** HEAVY DUTY ARM MOUNTING BRACKET INSURES STURDY MOUNTING TO CULTIVATOR OR CHISEL PLOW.

**2** ADJUSTABLE EXPANSION SPRING UNDER THE ARM HELPS STABILIZE THE HARROW SECTION IN THE FIELD AND IN TRANSPORT.

**3** A TRANSPORT PIN FURNISHED IN EACH BOX CLAMP ALLOWS THE HARROW SECTIONS TO BE LOCKED UP WHEN NOT IN USE.

**4** MULTIPLE HOLES IN THE BOX CLAMP ON THE ARM WILL ALLOW MOUNTING ON CULTIVATOR OR CHISEL PLOW BEAMS FROM 3" TO 7" DIAMETER. BRACKETS ARE ALSO AVAILABLE TO FIT ALLIS CHALMERS DIAMOND BAR FRAMES.

**5** POSITIVE SQUARE ON SQUARE MOUNTING IS USED ON BOTH ENDS OF THE HARROW ARM FOR A SOLID POSITIVE MOUNT.

## HARROW SECTIONS AVAILABLE IN:

### 2 BAR and 3 BAR MODELS

40" WORKING WIDTH    56" WORKING WIDTH    72" WORKING WIDTH    88" WORKING WIDTH