

**PORTABLE/FLIGHT ELEVATORS**

**MY-D HAN-D**

**PORTABLE ELEVATORS**

formerly Speed King



**MY-D HAN-D: BUILT LIKE YOUR FARM DEPENDED ON IT.**

 **GENERAL  
IMPLEMENT**  
DISTRIBUTORS

# PORTABLE/FLIGHT ELEVATORS

## ENGINEERED FOR EXTRA LENGTH . . .

### SPECIFICATIONS

Model Length	Undercarriage	A	B
31'	Regular	8'-10"	22'-0"
36'	Regular	12'-6"	25'-0"
41'	Regular	16'-11"	27'-3"
46'	Long	11'-6"	28'-6"
46'	Long	15'-0"	32'-0"
51'	Long	19'-4"	35'-2"

### HORSEPOWER REQUIREMENTS

(Normal Operation)

Model Length	Gas Engine		Electric Motor	
	HP	RPM	HP	RPM
31'	4	2400	2	1800
36'	4	2400	2	1800
41'	7	2400	3	1800
46'	7	2400	3	1800
51'	7	2400	3	1800

### CHAIN SPEED

Gas, 229 FPM. Electric, 172. PTO, 242.

Dimensions are approximate, based on elevator at 45°, and without options.

My-D Han-D Portable Elevators have carefully engineered balanced overhang. So combined with the heavy-duty tubular undercarriage that "tucks away," a 46' My-D Han-D unit reaches as far as conventionally designed 51' models.

That means you can buy a shorter, less expensive My-D Han-D elevator. And then get in close to cribs and buildings without an undercarriage in the way.

You get standard features from My-D Han-D like an adjustable friction-type clutch. It cushions shock loads, prevents chain breakage, and adds years of life to the drive mechanism.


And the main bearings are heavy-duty, self-aligning, life-time lubricated ball bearings.

Center location of attaching chain lengths and trough design prevent galvanized cupped flights from tipping to assure maximum material flow at any angle.

From the extra wide trough and optional tilt-up hopper to the strong cupped flights, My-D Han-D units are engineered to give you large capacity and a multitude of uses. You can handle ear and shelled corn, small grains, ensilage and baled hay.

Engineered for balance, one man can move and position elevator even with hopper in tilt-up position. Choose from PTO, gas or electric power. All drives come standard with 1050 roller chain and adjustable slip clutch. Safety features meet and/or exceed prescribed industry standards.

My-D Han-D Portable Elevators are available in five standard lengths: 31', 36', 41', 46' and 51'. Check the back page of this folder for options which will help make your elevator even more versatile.

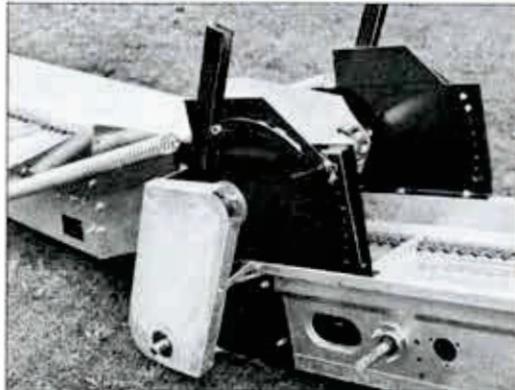


**Optional Tilt-Up Hopper.** Patented spring-loaded hopper can be easily raised and lowered, providing balance at any elevator angle. Ideal for unloading trucks and wagons. Elevator can be transported with hopper in raised position.

Adjustment plates, shown above, allow you to control spring tension and achieve perfect balance of hopper at any elevator angle.




**Full Width Trough** opening, at 20 1/2" wide and 7" deep. Allows bales to move freely from hopper to elevator.

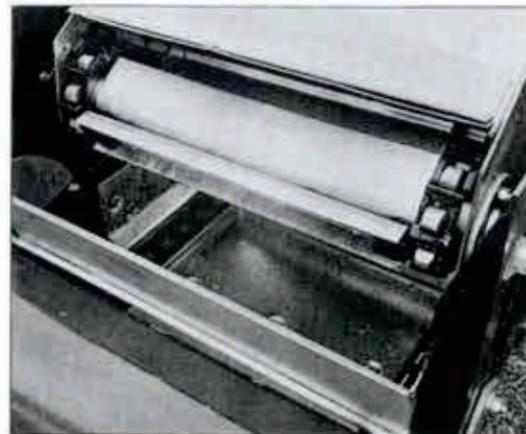

**Grain Saver.** A simple, yet effective device that works in conjunction with tilt-up hopper to prevent grain spillage.


# PORTABLE/FLIGHT ELEVATORS

## EXTRA STRENGTH . . . EXTRA SERVICE.

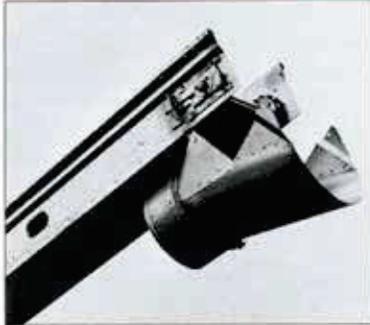


### Elevator Chain Take-Ups.

Premature wear on take-ups is reduced because they are located on outside of head section and don't come in contact with material.

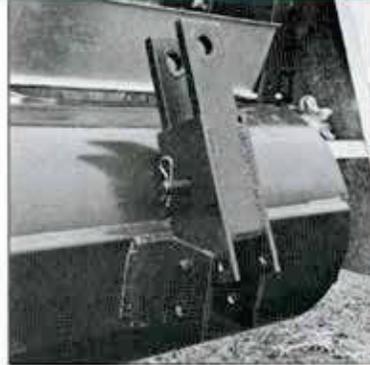


**Double Clevis Hitch.** Strong and rigid for towing. Change pin and swing out of the way when working.

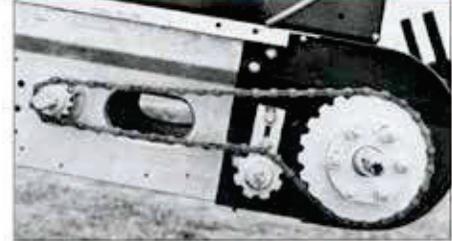

**Adjustable Speed Reduction** with optional Opposite Side Drive lets you drive the elevator from either side. Slip clutch can be adjusted for elevating various materials.

*Note: Guard removed for photographic reasons.*

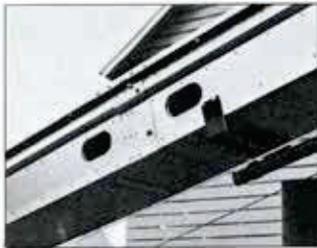

**Anti-Sag Construction.** Sturdy, rust-resistant galvanized steel trough sections are connected with embossed, interlocking joints. All section joints are reinforced to prevent sagging. Cadmium-plated bolts and nuts add extra corrosion resistance.




**Easy Lift Winch.** Mounted on axle arm for convenient accessibility, allows quick adjustment of discharge height. Holds securely, 2 1/2" drum, cable capacity, lifting capacity, and braking action meet rigid industry standards.



**Undercarriage/Lifting Assembly.** Extra strong reinforced tubular undercarriage and wide wheel base give elevator stability and make moves safer. Undercarriage "tucks away" to get in close to bins and cribs for maximum reach. Lifting assembly includes trough restraints and stops to hold trough securely in place.



**Corn Screen/Relief Door.** Standard features. Located in top section of elevator for maximum cleaning. Open the relief door to allow discharge of screened material. Leave closed while elevating small grains.

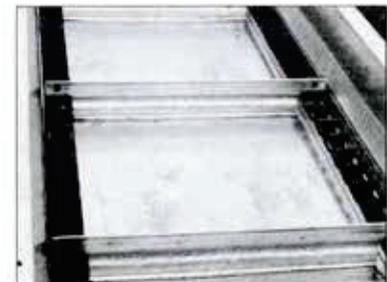

**Cupped Flights.** Strong galvanized flights are attached so as to prevent tilting. Give full capacity at the steepest angle. Your choice of #55 or #62 elevator chain available with C-1 attachment links standard.

# PORTABLE/FLIGHT ELEVATORS

## MY-D HAN-D PORTABLE ELEVATOR

# OPTIONS




**360° Swivel Head and Telescoping Spout** fills crib corners. Aim the flow where you want it. Large 18" diameter opening. Telescoping 4' downspout sections increase reach up to 16'. Assembly can be swung out of the way, or removed, for bale handling.



**Choose from three power options:** PTO, gas engine or electric motor. Shielded PTO, pictured at right, can be driven from either side. Drive Kit with mount for engine or motor is available (shown above).



*Note: PTO Shield removed for photographic reasons.*

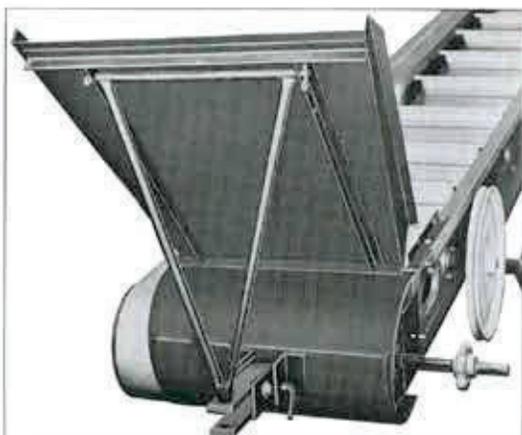

**Adjustable Bale Slide** increases the effectiveness of the elevator for handling baled materials. *Note: Guard removed for photographic reasons.*

★ MADE IN USA ★  
BUY AMERICAN

MY-D HAN-D



**Shovel Hopper** is available for use when dumping from truck or wagon. *Note: Guard removed for photographic reasons.*

Ask your dealer about these other high-quality  
**MY-D HAN-D** products:

**Portable Grain Augers.** Available in 6", 8" and 10" diameters, standard lengths to 81'.

**Utility Augers.** Handy helpers to have around. Four diameters: 4", 6", 8" and 10".

**Truck Augers.** For efficient transfer of grain from truck. Saves scooping and spillage.

**Cattle Equipment, Grain Drills, Hay Equipment, Grain Handling Equipment for Bin Systems and Seed Cleaners.**

# PORTABLE/FLIGHT ELEVATORS



## MY-D HAN-D PORTABLE CHAIN TROUGH ELEVATOR

Length	Undercarriage	#55 Chain		#62 Chain	
		Part No.	Weight	Part No.	Weight
21'	None	926048	561	926139	581
26'	None	926055	655	926147	680
26'	Regular	916113	1086	926170	1111
31'	Regular	926063	1180	926154	1210
36'	Regular	926071	1274	926162	1309
41'	Long	926121	1555	926246	1595
46'	Long	926097	1649	926253	1694
51'	Long	926105	1743	926261	1793

	Call for Pricing	Weight
620526	PTO Drive	30
620534	Gas/Elect. Motor Drive Base	50
620666	Opposite Side Drive Kit	15
926295	10' Tilt Up Feed Hopper	363
620450	4' Gravity Shovel Hopper	22
620468	Bale Slide Attachment	27
620427	Swivel Spout Head Assembly	30
620435	4' Down Spout Section	32
700617	Counterbalance Weight Box	42
720243	Chain Slowdown Kit	21



Prices and Specifications may be subject to change without notice. Prices do not include shipping or setup.