



Designed. Engineered. Remarkable Value.

Bale Handling Equipment

The quality choice in hay attachments



3-pt. Bale Spears

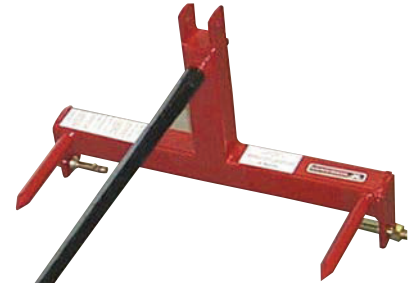
Worksaver



Get more done with a Worksaver hay attachment.



DBH-449



BSF-1523

Worksaver has the attachment that is right for your hay handling needs. Our 3-pt. mounted bale spears are designed, depending on model, to handle up to 3,000 lb. bales (DBH-6000 rated at 6,000 lbs.). The line features forged spring steel spears designed for hard center bales allowing easier spear penetration of and withdrawal from bale(s). Most models are designed to mount to Category I/II hitches unless noted.



HS-330



HS-2200

3-pt. Bale Spears

Model	Item No.	Description	Weight
BSF-1523	830235	Rated for round bales up to 1,800 lbs. Tapered main spear has usable length of 44" with welded balance spears. Fits Cat. I/II hitch.	57 lbs.
HS-2200	832310	Rated for round bales up to 2,200 lbs. Bolt-in forged spear with 42" usable length. Two welded balance spears. Cat. I/II Quick Hitch compatible.	72 lbs.
HS-3000	830775	Dual bolt-in forged spears with 42" usable length. Spears are spaced 26" apart allowing bale to be picked up & not lose its orientation. Rated at 3,000 lbs. Fits Cat. I/II Quick Hitches.	78 lbs.
HS-330	832615	Triple bolt-in forged spears with 26" usable length. Spears are spaced 28-1/2" apart, ideal for mid-size square bales. Overall unit width of 57.75". Fits Cat. II/III hitch & Quick Hitches.	163 lbs.
DBH-449	832610	Four bolt-in forged spears with 42" usable length. Designed to handle two round bales at once. Overall unit width of 96". Fits Cat. II/III hitch & Quick Hitches.	250 lbs.
DBH-6000	834100	Four bolt-in spears, square frame design allowing transport of two 6-ft. round bales at once. Rated at 6,000 lbs. Overall unit width of 76". Fits Cat. II/III hitch & Quick Hitches.	295 lbs.



DBH-6000

Choose the **Worksaver** Way to Handle Your Hay

Bale Unroller & Handler

Worksaver



HHU-2045

Model	Item No.	Description	Weight
HHU-2045	831340	3-pt. Hay Handler/Unroller rated at 2,200 lbs. Designed for round bales either 4' or 5' in width up to 6' in diameter (requires a 2-1/2" x 8" cylinder and hoses, which are not included).	310 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

Ideal for unrolling large round bales for feeding. Conserves hay – by unrolling what cattle will eat in one hour. Easy operation from the tractor seat. Allows easy feeding relocation, which reduces manure buildup. The HHU-2045 fits Cat. I/II hitches, as well as Cat. I or II Quick Hitch.

Bucket Bale Spears

Quickly convert your front loader bucket into a tool for handling large round bales. Each spear mounts on the bucket cutting edge with heavy angle iron for additional support and utilizes the bucket underside for leverage. The bolt-on or chain system is used to firmly lock the spear on the bucket. These units use tapered “forged” bolt-in steel spears.



WARNING: Bale spears are to be inserted into bales. DO NOT use spears as forks.



CBSF-3028



CBSF-2000

Model	Item No.	Description	Weight
BBSF-20	830185	Bolt-on Bucket Bale Spear for round bales. Rated at 2,000 lbs. Bolt-in spear has usable length of 42". Requires drilling one 17/32" dia. hole in the bucket. Bolt-together design.	65 lbs.
CBSF-2000	830190	Clamp-on Bucket Bale Spear for round bales. Rated at 2,000 lbs. Uses chain & turnbuckle system. Bolt-in spear has usable length of 42". Bolt-together design.	76 lbs.
CBSF-2028	831920	Clamp-on Bucket Dual Bale Spear for round bales. Rated at 3,000 lbs. Uses chain & turnbuckle system. Bolt-in spears have usable length of 42". NOTE: Spears must be inserted into the bale.	101 lbs.
CBSF-3028	831955	Clamp-on bucket triple bale spear for square bales. Rated at 4,000 lbs. uses dual chain & turnbuckles. Bolt-in spears have usable length of 42". NOTE: Spears must be inserted into the bale.	185 lbs.










CBSF-2028









BBSF-20

Choose the **Worksaver** Way to Handle Your Hay

Hay Handling Attachments

Designed for Use on Tractor 3-pt Hitch Only.					
Product	Model	Item #	Description	Lbs.	List
 Repl. Spear #831290	BSF-1523	830235	3-pt Bale Spear. Rated for Round Bales to 1,800 lbs. Main spear is tapered with 44" useable length. Features welded balance spears. (Cat I / II) Ships UPS	57	364.00
 Repl. Spear #830928	HS-3000	830775	Dual bolt-in spears with, 42" useable length, rated 3,000 lbs.. Round bales maintain orientation. Fits Cat I & II / Quick hitches.	105	623.00
 Repl. Spear #830928	HS-2200	832310	3-pt Bale Spear for Round Bales to 2,200 lbs. Bolt-in spear with useable length of 42" Welded balance spikes. Cat I / II quick hitch compatible. Ships UPS.	72	497.00
 Repl. Spear #830924	HS-330	832615	3-pt. Triple Bale Spear rated 3,000 lbs. Features bolt-in forged spears (26" useable length) Cat. II & III. For mid-size square bales. Cat. I/II quick hitch compatible	163	1,001.00
 Repl. Spear #830928	DBH-449	832610	3-pt. Four Spear Bale Handler. Features bolt-in forged spears (42" useable) Overall width 96". Cat. I & III Quick Hitch compatible For two round bales - 4,000 lbs.	251	1,442.00
 Repl. Spear # 830928	DBH-6000	834100	3-pt Dual Bale Handler for round bales, overall unit width 76".. Rated at 6,000 lbs. Transport two round bales at once. Cat. II/III quick hitch compatible. Includes parking stand	295	1,463.00
	HHU-2045	831340	3-pt Hay Handler / Unroller. Rated at 2,200 lbs. For 4' and 5' wide round bales up to 6' in diameter. Requires a 2" x 8" ASAE hydraulic cylinder (not included). Fits Cat I / II quick hitches	285	1,463.00
Cylinder Kit		832135	Hydraulic Kit-Unroller, includes 2 x 8 ASAE cylinder, hoses and couplers		504.00

Hay Handling Attachments

Designed for Use on Front Loader Buckets					
Product	Model	Item #	Description	Lbs.	List
 Repl. Spear #830928	BBSF-20	830185	Bolt-on Bucket Bale Spear for round bales. Rated at 2,000 lbs. Bolt-in spear has useable length of 42". Requires drilling one 17/32" dia. hole in the bucket. Bolt-together design. Ships in one carton. (UPS)	65	476.00
 Repl. Spear #830928	CBSF-2000	830190	Clamp-on Bucket Bale Spear for round bales. Rated at 2,000 lbs. Uses chain & turnbuckle system. Bolt-in spear has useable length of 42". Bolt-together design. Ships in one carton. (UPS)	76	553.00
 Repl. Spear #830928	CBSF-2028	831920	Clamp-on Bucket Dual Bale Spear for round bales. Rated at 3,000 lbs. Uses chain & turnbuckle. Bolt-in spears have useable length of 42". (Note: SPEARS MUST BE INSERTED INTO BALE)	102	854.00
 Repl. Spear # 830928	CBSF-3028	831955	Clamp-on Bucket Triple Bale Spear for square bales. Rated at 4,000 lbs. Uses dual chain & turnbuckles. Bolt-in spears have useable length of 42" (Note: SPEARS MUST BE INSERTED INTO BALE)	185	1,239.00
Hydraulic Top Link Cylinders					
	TLC-2708	831612	Cat. I Hydraulic Top Link Cylinder 2" x 8" (19-7/8" ctr. / ctr. closed)	18	308.00
	TLC-3110	831619	Top Link Hydraulic Cylinder Cat. II 3" x 10" (21-1/4" ctr. / ctr. closed)	26	392.00

FLBS-Series Loader Attachments

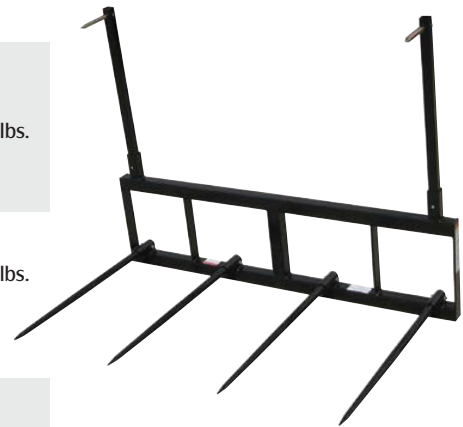
Work saver



FLBS-330/340 –
Shown as FLBS-330

Handling large or mid-size rectangular bales is easier using one of our models to perform the job. All models feature tapered “forged” spring steel spears. Optional pin-on brackets or interfacing brackets for most popular quick-attach front loaders are available. Select models are convertible for use on a 3-pt. hitch with the addition of the optional bolt-on ear assembly (not Quick Hitch adaptable).

Model	Item No.	Description	Weight
FLBS-330	832390	Triple bolt-in forged spears with usable length of 26". Spears are spaced 26-1/2" apart. Rated at 3,000 lbs. For handling mid-size square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	164 lbs.
FLBS-340	832395	Triple bolt-in forged spears with usable length of 42". Spears are spaced 26-1/2" apart. Rated at 4,000 lbs. For handling larger square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	198 lbs.
FLBS-432	832405	Four bolt-in spears with usable length of 26". Spears are spaced 24" apart. Frame is 79-1/2" wide for handling mid-size square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	169 lbs.
FLBS-449	832410	Four bolt-in forged spears with usable length of 42". Spears are spaced 24" apart. Frame is 79-1/2" wide for handling large square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	212 lbs.
Optional Bolt-in Uprights & Bolt-on Ear Assembly			
	831095	Optional bolt-in uprights for FLBS models 330/340/432/449 to allow handling two bales.	69 lbs.
	831815	Bolt on assembly allows select FLBS models to be used on a Cat. II 3-pt hitch (requires 830345 standard brackets with 830358 bushing kit makes unit Quick Hitch compatible).	88 lbs.



FLBS-449/432 –
Shown as FLBS-449
with optional uprights



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

FLBS-Series Loader Attachments

The FLBS-Series is designed for use on pin-type front loaders or most popular quick-attach front loader systems using our optional interfacing brackets.



FLBS-3000






FLBS-2200

Model	Item No.	Description	Weight
FLBS-2200	832380	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Single 1-1/4" diameter balance spear usable length 16". Optional interfacing brackets for most loaders are available.	121 lbs.
FLBS-3000	832385	Dual bolt-in forged spears with usable length of 42". Rated at 3,000 lbs. Optional interfacing brackets for most loaders are available.	136 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

Hay Handling Attachments

Designed for Use on Tractor Front Loaders					
Product	Model	Item #	Description	Lbs.	List
The FLBS Series is designed for use on tractor front loaders. Features all welded frame, cast steel weld-on spear sockets and bolt-in spears for durability. Three (3) and four (4) spear models include sockets for optional uprights (831095), enabling the unit to handle two bales at once. Instead of using #831110 bracket, consider SSB or SSRB Series Bale Spears,					
 Repl. Spear #830928	FLBS-2200	832380	Loader Bale Spear rated at 2,200 lbs. Single tapered spear has useable length of 42" Optional interfacing brackets for most quick attach systems available.	121	665.00
 Repl. Spear #830928	FLBS-3000	832385	Loader Bale Spear rated at 3,000 lbs. Dual tapered spears have useable length of 42". Optional brackets for most quick attach systems available.	136	791.00
 Repl. Spear #830924	FLBS-330 Shown with optional uprights	832390	Loader Bale Spear rated at 3,000 lbs. for handling mid-size square bales. Triple spears have useable length of 26", spaced 26-1/2" apart. Optional interfacing brackets available.	164	966.00
 Repl. Spear #830928	FLBS-340 (uprights available)	832395	Loader Bale Spear rated at 4,000 lbs. for larger square bales. Triple spears have useable length of 42", spaced 26-1/2". Optional interfacing brackets available.	198	1,015.00
 Repl. Spear #830924	FLBS-432 (uprights available)	832405	Loader Bale Spear to handle mid-size square bales. Features 79-1/2" wide frame with 4 tapered spears - useable length 26", spaced 24". Opt. interfacing brackets available Rated 4,000 lbs..	169	1,211.00
 Repl. Spear #830928	FLBS-449 (uprights available)	832410	Loader Bale Spear to handle large square bales. 79-1/2" wide frame with 4 tapered spears, useable length of 42", spaced 24". Opt. interfacing brkts. available. Rated 4,000 lbs.	212	1,253.00
 Repl. Spear # 830928	FLBS-6000	834160	Front loader Dual Bale Handler. Transport two round bales at once. Unit is 76"x24" rated at 6,000 lbs. <u>Requires loader brackets be welded to the unit.</u>	250	1,281.00
	Optional Uprights	831095	For handling two square bales. Fits models FLBS-330 / 340 / 432 / 449	32	119.00
	Option top link brkt. kit for FLBS Models (Except FLBS-2200)	831815	Bolt on assembly allows FLBS attachments to be used on a Cat. II 3-pt. hitch.(also requires #830345 std. brkts.)	17	119.00
Note: On some multiple spear units, brackets may need to be welded to frame rather than bolted due to loader arm spacing.					
All units are priced less brackets. Pin-on or quick attach brackets must be ordered separately.					



Integrated-Frame Design for John Deere Loaders

Worksaver



Quality attachments that are changing it all!

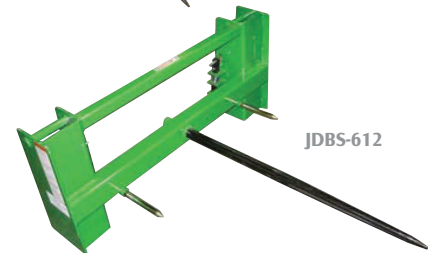
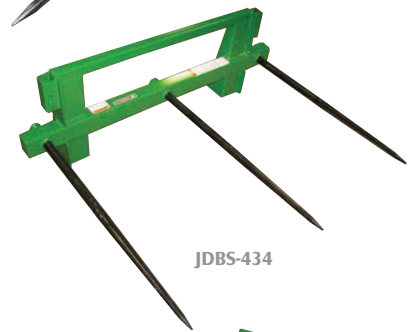
Integrated-Frame Design for select John Deere loaders that utilize the John Deere OEM quick attach system. All welded frame design with durable bolt-in forged spears.

Integrated-Frame Design for John Deere loader models: 300, 300CX, 400X, 410, 420, 430, 440, 460, 520, 521, 540, and 541.

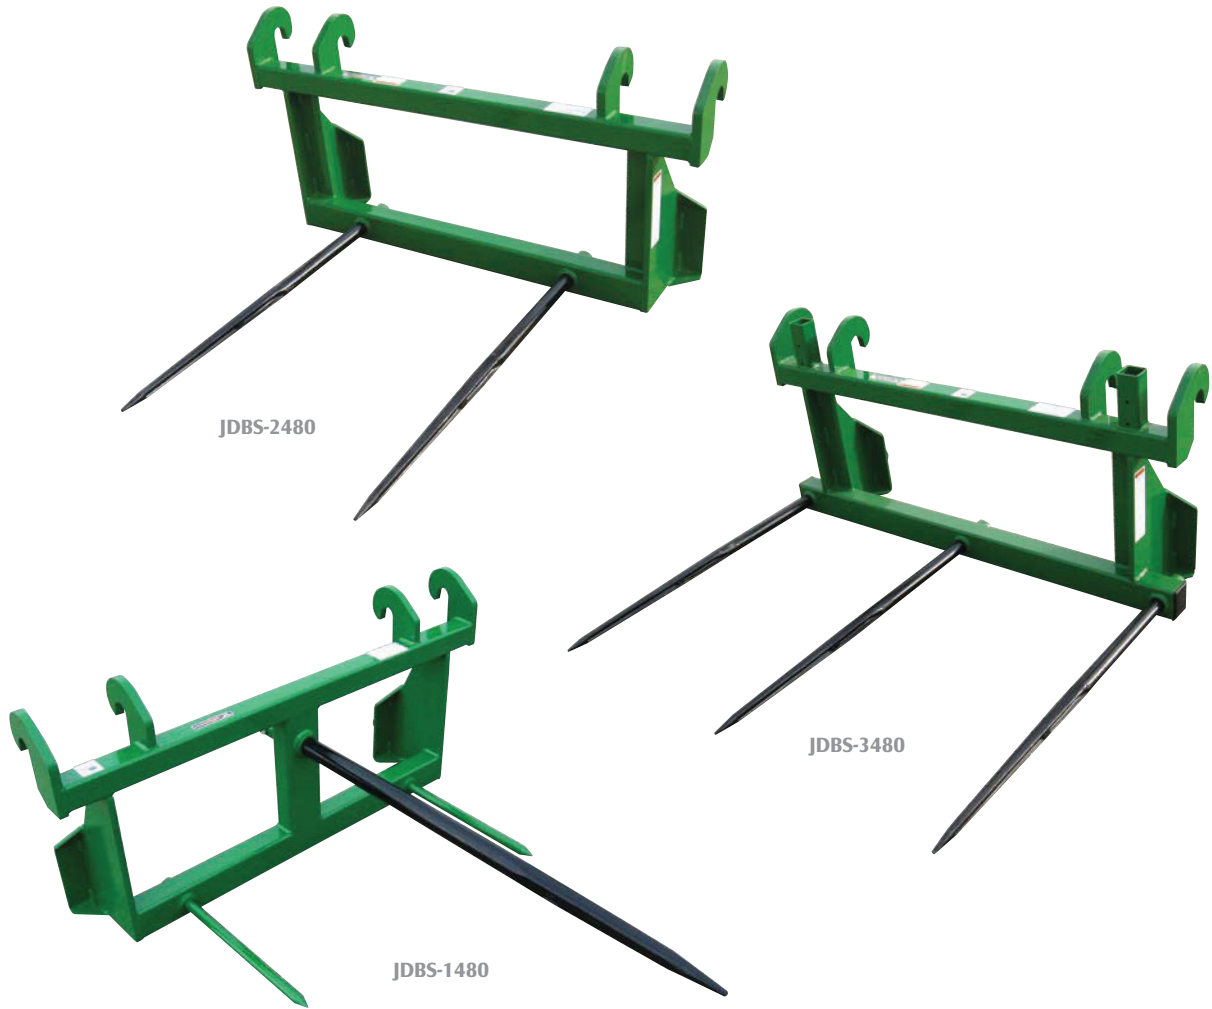
Model	Item No.	Description	Weight
JDBS-412	832290	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Two balance spikes.	121 lbs.
JDBS-423	832320	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". Rated at 3,000 lbs.	156 lbs.
JDBS-433	832330	Triple bolt-in forged spears spaced 28" apart, with usable length of 26". Rated at 3,000 lbs.	164 lbs.
JDBS-434	832335	Triple bolt-in forged spears spaced 28" apart, with usable length of 42". Rated at 4,000 lbs.	191 lbs.
Optional Bolt-on Upright Kit			
	831095	Optional bolt-on upright kit for handling two bales. Fits models JDBS-433 & -434.	32 lbs.

Integrated-Frame Design for John Deere 600/700 series loader (Non-Global) with quick attach models: 620, 640, 720, 721, 725, 726, 740, and 741.

Model	Item No.	Description	Weight
JDBS-612	832340	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Two balance spikes.	176 lbs.
JDBS-623	832350	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". Rated at 3,000 lbs.	196 lbs.
JDBS-633	832355	Triple bolt-in forged spears spaced 28" apart, with usable length of 26". Rated at 3,000 lbs.	204 lbs.
JDBS-634	832630	Triple bolt-in forged spears spaced 28" apart, with usable length of 42". Rated at 4,000 lbs.	231 lbs.
Optional Bolt-on Upright Kit			
	831095	Optional bolt-on upright kit for handling two bales. Fits models JDBS-633 & -634.	32 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.



Integrated-Frame Design for John Deere H480 Loader with Global Series II Tool Carrier.






Model	Item No.	Description	Weight
JDBS-1480	834135	Single bolt-in forged spear with usable length of 52". Rated at 2,800 lbs. For handling round bales.	310 lbs.
JDBS-2480	834120	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". Rated at 3,800 lbs. For round bales.	265 lbs.
JDBS-3480	834125	Triple bolt-in forged spears spaced 26" apart, with usable length of 42". Rated at 4,800 lbs. Four larger square bales (use optional upright kit 831095 when handling two bales).	300 lbs.
Optional Bolt-on Upright Kit			
	831095	Optional bolt-on upright kit for handling two bales. Fits models JDBS-433 & -434.	32 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.



Choose the Worksaver Way to Handle Your Hay

Euro / Global-Style Integrated Frame Bale Spears All welded frame with the Global /Euro-Style quick attach brackets. Features bolt-in forged spears. Replacement Spears & Kits can be found on page 11.					
Product	Model	Item #	Description	Lbs.	List
 Repl. Spear #830928	GLB-2200	832205	Single bolt-in forged spear with useable length of 42". Two balance spikes, 1"x 8-1/2" useable. For round bales. Rated at 2,200 lbs.	130	735.00
 Repl. Spear #830928	GLB-3000	832220	Dual bolt-in forged spears spaced 30" apart, with useable length of 42". For round bales. Rated at 3,000 lbs.	144	882.00
 Repl. Spear 830928	ELB-3000	832195	Dual bale spear with bolt-in spears mounted in lower tube for handling round bales. Useable length 42", rated at 3,000 lbs.	168	1,001.00
 Repl. Spear # 830924 Repl. Spear # 830928	ELB-330 (uprights available)	832365	Triple bolt-in spears mounted in lower tube for handling square bales, useable spear length of 26" Rated 3,000 lbs.	175	1,218.00
	ELB-340 (uprights available)	832370	Triple bolt-in spears mounted in lower tube for handling square bales, useable spear length of 42" Rated 4,000 lbs.	200	1,267.00
		831095	Optional bolt-on upright kit for handling two square bales. Fits GLB-330 / 340.	32	119.00
Optional upright kit (831095) must be used when handling two bales with ELB-330 / 340					
 Repl. Spear # 830928	GDBH-6000	834155	Designed for tractor front loaders that use the Euro/Global quick-attach system. Transport two 6' diameter bales at once. Frame sizes 76" x 24" with 4-bolt-in spears with 42" useable length. Rated at 6,000 lbs.	265	1,463.00
Bale Squeeze for Large Rectangular Bales Global/Euro Mount					
	GLBS-48D	834210	<u>Both arms open on this Large Bale Squeeze.</u> For tractor front loaders that use the Euro/Global quick attach system. <u>Shipped less hoses & couplers to rear remotes</u>	730	4,970.00

Euro/Global Style Integrated Frame Bale Spears

All welded frame design that incorporates the Euro/Global interface. Designed to fit tractor loaders with the widely used Euro/Global tool carrier. All units feature bolt-in forged spears.



Model	Item No.	Description	Weight
GLB-2200	832205	Single bolt-in forged spear with usable length of 42". Two balance spikes. For round bales. Rated at 2,200 lbs.	114 lbs.
GLB-3000	832220	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". For round bales. Rated at 3,000 lbs.	128 lbs.
ELB-330	832365	Triple bolt-in forged spears spaced 26" apart, with usable length of 26". For handling single or double (with optional uprights #831095) mid-size square bales. Rated at 3,000 lbs.	175 lbs.
ELB-340	832370	Triple bolt-in forged spears spaced 26" apart, with usable length of 42". For handling single or double (with optional uprights #831095) large-size square bales. Rated at 4,000 lbs.	200 lbs.
Optional Bolt-on Upright Kit			
	831095	Optional uprights for GLB-330 & -340.	32 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

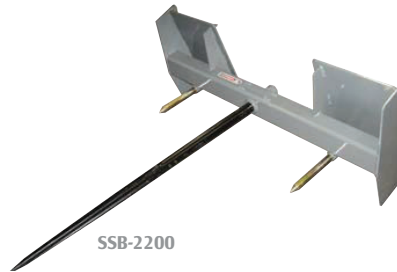
Choose the **Worksaver** Way to Handle Your Hay

Skid Steer & Front Loader Bale Handling Attachments

Worksaver



SSRB-340



SSB-2200



SSB-3000



SSRB-330
with optional
uprights







Designed for skid steer and tractor front loaders that use the industry standard "universal quick-attach" system. Patented design allows easy access to the skid steer seat due to its step through feature. Models are offered for round bales as well as rectangular bales, forged bolt-in spears allow easy spear penetration of the bale.

Model	Item No.	Description	Weight
SSB-2200	831060	Skid Steer Single Bale Spear. Forged bolt-in spear with usable length of 42". Rated at 2,200 lbs.	129 lbs.
SSB-3000	831070	Skid Steer Dual Bale Spear. Forged bolt-in spears with usable length of 42". Rated at 3,000 lbs.	146 lbs.
SSRB-340	831090	Skid Steer Triple Bale Spear. Forged bolt-in spears spaced 26" apart, with usable length of 42". For handling single or double (with optional uprights # 831095) large-size square bales. Rated at 4,000 lbs.	190 lbs.
SSRB-330	831080	Skid Steer Triple Bale Spear. Forged bolt-in spears spaced 26" apart, with usable length of 26". For handling single or double (with optional uprights # 831095) mid-size square bales. Rated at 3,000 lbs.	165 lbs.
Optional Bolt-on Uprights			
	831095	Optional bolt-on uprights for SSRB-330 & SSRB-340 allow handling two bales at once.	32 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

Hay Handling Attachments

Designed for Tractor Front Loaders & Skid Steer Loaders					
Manufactured to interface with the “Universal” skid steer quick attach mounting system					
Product	Model	Item #	Description	Lbs.	List
 Repl. Spear 830928	SSB-2200	831060	Skid Steer Single Bale Spear. Rated at 2,200 lbs. Designed to interface with ‘universal’ skid steer quick-attach system. Bolt-in tapered spear has useable length of 42”	129	758.00
 Repl. Spear 830928	SSB-3000	831070	Skid Steer Double Bale Spear. Rated at 3,000 lbs. Designed to interface with “universal” skid steer quick-attach system. Bolt-in tapered spears have useable length of 42”	146	898.00
Optional upright kit (831095) must be used when handling two bales with SSRB-330 / 340.					
 Repl. Spear 830928	SSRB-340 (Shown with optional uprights)	831090	Skid Steer Triple Bale Spear. Rated at 4,000 lbs. For handling large-size square bales. Bolt-in spears have useable length of 42”, spaced 26-1/2” apart. Interfaces with “universal” skid steer quick-attach system	190	1,038.00
 Repl. Spear 830924	SSRB-330 (Uprights available)	831080	Skid Steer Triple Bale Spear. Rated at 3,000 lbs. For mid-size square bales. Bolt-in spears have useable length of 26”, spaced 26-1/2” apart. Interfaces with “universal” skid steer quick-attach system	165	1,008.00
	SSDBH-6000	834260	Skid Steer Dual Bale Handler. Transport two 6' round bales at once. Frame size 76" x 24" with 4-bolt-in spears, with usable length 42" Rated at 6,000 lbs.	345	1,463.00
Option for SSRB-340 & SSRB-330		831095	Optional bolt on uprights for SSRB For handling two square bales	32	119.00
	SSBH-2072	832965	Skid Steer Bale Hand. Rated at 2,200 lbs. Designed to handle 4 ft to 6 ft round bales. Both arms open to clamp bale. Hyd. cylinder is included (less hoses), with “universal” skid steer quick-attach system	572	3,717.00
	SSBH-2072R for solenoid kit)	832995	Rotating Skid Steer Bale Hand. Rated at 2,200 lbs. Designed to handle 4 ft to 6 ft round bales. Both arms open to clamp bale. Hyd. cylinder is included (less hoses), with “universal” skid steer quick-attach system	730	5,187.00
	SSBS-48D	834200	Both arms open on this large bale squeeze. Skid steer type mount. Hyd. Cyl. Hoses couplers standard.		5,110.00

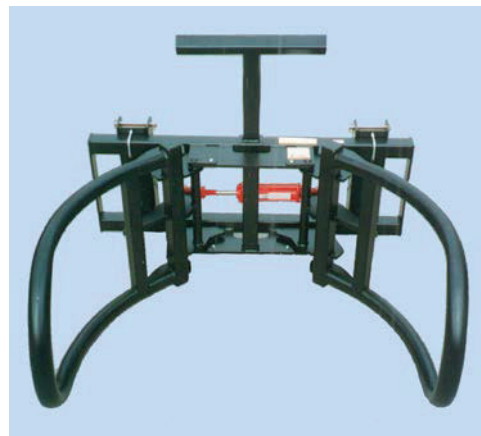
Note: SSB, SSRB, SSBH, series will not fit Case model 1840 w/ narrower lock pin location.

UBH-Series for Wrapped (or Dry) Round Bales

The “Bale Hugger” & “Bale Hand” will gently handle large round wrapped or unwrapped bales with weight up to 2,200 lbs. Both provide smooth curved clamping arms to prevent wrapped bale puncture. Each unit fits most double-cylinder front loaders with loader arm distance of 54” or less. Optional pin-on brackets or interfacing brackets for most popular quick-attach front loaders are available with loader arm distance of 54” or less.



UBH-2000




UBH-2072

Model	Item No.	Description	Weight
UBH-2000	832850	“Bale Hugger” rated at 2,200 lbs. Designed to handle round bales from 4’ to 6’. Features one stationary arm, one opening arm. Hydraulic cylinder included.	435 lbs.
UBH-2072	832940	Designed to handle round bales from 4’ to 6’. Both arms open and close to clamp bale. Hydraulic cylinder included. Rated at 2,200 lbs.	529 lbs.






WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

Hay Handling Attachments

Bale Hand for Round Bales					
Designed to handle round bales from 4-ft to 6-ft. Both arms open and close to clamp bale.					
“R” models rotate 110° to aid in stacking bales. Hydraulic cylinder included. Rated at 2,200 lbs.					
Product	Model	Item #	Description	Lbs.	List
	UBH-2072	832940	Bale Hand. Rated at 2,200 lbs. Designed to handle 4-6 ft. round bales. Both arms open to clamp bale. Hydraulic cylinder (less hoses) is included. Optional interfacing brackets for most quick attach systems are available. Not for 3-pt	520	3,255.00
	GLBH-2072	832980	Designed for tractor front loaders that use the Euro/Global quick attach system. Unit will gently handle wrapped and unwrapped round bales from 4-ft to 6-ft in diameter. Rated at 2,200 lbs. unit includes hydraulic cylinder (less hoses.)	555	3,668.00
	SSBH-2072	832965	Skid Steer Bale Hand. Rated at 2,200 lbs. Designed to handle 4 ft. to 6 ft. round bales. Both arms open to clamp bale. Hydraulic cylinder is included (less hoses).	572	3,717.00
New “R” rotates 110° to aid in stacking bales. Hydraulic cylinder included Rated at 2,200 lbs.					
	UBH-2072R	832990	Rotating Bale Hand. Rated at 2,200 lbs. Designed to handle 4-6 ft. round bales. Both arms open to clamp bale. Hydraulic cylinder (less hoses) is included. Optional interfacing brackets for most quick attach systems are available. Not for 3-pt	705	4,844.00
	JDBH-2072R	832975	Rotating Bale Hand Designed for tractor front loaders that use the John Deere 400/500 style quick attach system. Unit will gently handle wrapped and unwrapped round bales from 4-ft to 6-ft in diameter. Rated at 2,200 lbs. unit includes hydraulic cylinder (less hoses).	740	5,138.00
	SSBH-2072R	832995	Rotating Skid Steer Bale Hand. Rated at 2,200 lbs. Designed to handle 4 ft. to 6 ft. round bales. Both arms open to clamp bale. Hydraulic cylinder is included (less hoses).	730	5,187.00
	Solenoid Kit	832379	Optional solenoid kit for skid steers equipped with single auxiliary valve. Includes solenoid valve, hoses and flat face connect under pressure couplers		1,365.00

Hay Handling Attachments

Hydraulic RW Spin Off for Round Bales					
Hydraulically rotates the bale, unwinding the hay into a windrow. Rotates in both directions					
Product	Model	Item #	Description	Lbs.	List
	FSO-906	831000	3-pt mounted hydraulically driven bale spin off for Cat. II / III size tractors. Requires 8-10 gpm of hydraulic flow. Hoses (less couplers) are included. Tapered forged spear, rated at 2,200 lbs.	250	3,164.00
	Pin Kit	830295	Pin & Bushing Kit for FSO-906 to allow use on Cat. 1 3-pt hitch tractors		165.00
	FLSO-907	831020	Front Loader mounted hydraulically driven bale spin off. Requires 8-10 gpm of hydraulic flow (less hoses). Tapered forged spear, rated at 2,200 lbs. Opt. inter-facing brackets (not included) for most quick attach systems available – pages 57-71.	288	3,479.00
	SSO-908	831030	Skid Steer mounted hydraulically driven bale spin off. Requires 8-10 gpm of hyd. flow. Hoses (less couplers) are included Interfaces with “universal” Skid Steer quick-attach. Rated at 2,200 lbs.	325	3,794.00

Note: All Weights shown are an estimated weight and do not include shipping materials.

Bale Hand for Round Bales					
Designed to handle round bales from 4-ft to 6-ft. Both arms open and close to clamp bale.					
“R” models rotate 110° to aid in stacking bales. Hydraulic cylinder included. Rated at 2,200 lbs.					
Product	Model	Item #	Description	Lbs.	List
New “R” rotates 110° to aid in stacking bales. Hydraulic cylinder included Rated at 2,200 lbs.					
	GLBH-2072R	832985	Rotating Bale Hand Designed for tractor front loaders that use the Euro/Global quick attach system. Unit will gently handle wrapped and unwrapped round bales from 4-ft to 6-ft in diameter. Rated at 2,200 lbs. unit includes hydraulic cylinder (less hoses).	735	5,138.00
	Solenoid Kit	832964	Optional Solenoid Kit for Euro / Global or Front Loader Rotating Bale Hand when mounted to power units equipped with single auxiliary valve. Includes mounting plate, solenoid valve, hoses & couplers		1,365.00

Hay Handling Attachments

Product	Model	Item #	Description	Lbs.	List
<p>Large Rectangular Bale Carriage. Frame provides great visibility to pick-up and transfer bales. Handles either two 4'x4'x8' or three 3'x3'x8' rectangular bales, rated at 6,000 lbs. Features four (4) bolt-in spears with useable length of 40.5" and two (2) balance spears</p>					
	RBH-4600U	833630	Designed for tractor front loaders requires optional interfacing brackets for most quick attach systems		2,485.00
	RBH-4610E	833635	Designed for tractor front loaders with Euro/Global QA system.	552	2,359.00
	RBH-4620M	833640	Designed for Manitou Telehandlers models MLT-625, MLT-634, MLT-730, MLT-737, MLT-840, MLT-841, MLT-960, MLT-961, Gehl CT-516, CT-618, CT-723, New Holland LM 435(Blue), LM 5040, LM 5050, LM 5060, TH7.42, TH9.35	592	2,457.00
	RBH-4630SS	833645	Designed for Skid Steer & tractor loaders with "universal" skid steer quick-attach system	539	2,485.00
	RBH-4640JCBQ	833650	Designed for JCB Telehandler and wheel loaders with Q-Fit models JCB- TM310, TM320, TM420 525, 530, 530B. 532, 536, 540, 550, 5508, 505-19, 505-22,506-36, 508-40, 510-40, 506-23TC, 508-66TC, 509-23STC, 509-45STC, 510-44STC, 510-55STC, 512-26STC, 526-56AGRI, 527-58AGRI, 535-95AGRI, 536-60AGRI Plus, 541-70AGRI Plus, 560-80AGRI Plus,	653	2,534.00
	RBH-4650-JDWL	833655	Designed for John Deere Wheel Loader Models 244J, 304J	604	2,499.00
	RBH-4660 JD Global Cat. 2	833660	Designed for John Deere tractor front loaders with Global Category 2 carriers		2,800.00
	RBH-4670 JRB-416	833665	Designed for wheel-loaders equipped with JRB-416 quick coupler		
	RBH-4680BC	833670	Designed for Bobcat Telehandlers Models		

Hay Handling Attachments

Product	Model	Item #	Description	Lbs.	List
Large Rectangular Bale Carriage with Adjustable Uprights. Frame provides great visibility to pick-up and transfer bales. Handles either two 4'x4'x8' or three 3'x3'x8' rectangular bales, rated at 4,400 lbs. Features four (4) bolt-in spears with useable length of 40.5" and two (2) balance spears					
	RBH-6500U	833235	Designed for tractor front loaders requires optional interfacing brackets for most quick attach systems	470	2,255.00
	RBH-6510E	833265	Designed for tractor front loaders with Euro/Global QA system.	476	2,220.00
	RBH-6520M	833270	Designed for Manitou Telehandlers models MLT-625, MLT-634, MLT-730, MLT-737, MLT-840, MLT-841, MLT-960, MLT-961, Gehl CT-516, CT-618, CT-723 New Holland LM 435(Blue), LM 5040, LM 5050, LM 5060	516	2,255.00
	RBH-6530SS	833275	Designed for Skid Steer & tractor loaders with "universal" skid steer quick-attach system	463	2,255.00
	RBH-6540JCBQ	833280	Designed for JCB Telehandler and wheel loaders with Q-Fit models JCB- TM310, TM320, TM420 525, 530, 530B. 532, 536, 540, 550, 5508, 505-19, 505-22, 506-36, 508-40, 510-40, 506-23TC, 508-66TC, 509-23STC, 509-45STC, 510-44STC, 510-55STC, 512-26STC, 526-56AGRI, 527-58AGRI, 535-95AGRI, 536-60AGRI Plus, 541-70AGRI Plus, 560-80AGRI Plus,	577	2,300.00
	RBH-6550JDWL	833285	Designed for John Deere Wheel Loader Models 244J 304J	528	2,270.00
	RBH-6560 JD Global Cat. 2	833210	Designed for John Deere tractor front loaders with Global Category 2 carriers		
	RBH-6570JRB-416	833290	Designed for wheel-loaders equipped with JRB-416 quick coupler		
	RBH-6580BC	833295	Designed for Bobcat Telehandlers Models		





Designed for Select Telehandlers

Manufactured to interface with Select OEM Telehandler Mounts

Replacement Spears & Kits can be found on page 11.




JCB Telehandlers with JCB Q-Fit Quick Attach

For Models JCB 525, 530, 532, 536, 540, 550, 5508, 505-19, 505-22, 506-36, 508-40, 506-23TC, 508-66TC, 509-23STC, 509-45STC, 510-44STC, 510-55STC, 512-26TC, 526-56AGRI, 527-58AGRI, 535-95AGRI, 536-60AGI, 536-60AGRI Plus, 541-70AGRI Plus, 560-80AGRI Plus & old style 520, 525







Product	Model	Item #	Description	Lbs.	List
	X-152JCBQ	833580	Single spear bale spear for JCB Q-Fit. Single 55 mm spear with useable length of 52-inches for round bales. Rated at 3,000 lbs.	319	1,575.00
	X-242JCBQ	833585	Dual bolt-in forged spears spaced 34" apart, with useable length of 42". Fits JCB Q-Fit Rated at 3,800 lbs. For round bale	275	1,365.00
	X-326JCBQ	833590	Triple bolt-in forged spears spaced 26" apart, useable length of 26". Fits JCB Q-Fit Rated at 3,000 lbs. For Mid-size square bales.	272	1,575.00
	X-342JCBQ	833594	Triple bolt-in forged spears spaced 26" apart, useable length of 42". Fits JCB Q-Fit Rated at 4,000 lbs. For large square bales.	295	1,694.00
	X-642JCBQ	833595	Transport two 6' diameter bales at once Frame size 76"x 24" w/ 4-bolt-in spears, useable length 42" for JCB Q-Fit	358	1,533.00

Manitou Telehandlers with OEM Quick Attach












For Manitou models MLT-625, MLT-634, MLT-840, MLT-960, Also fits Gehl Models CT-516, CT-618, CT-723
Also fits New Holland Models LM-435 (Blue), LM-5040, LM-5050, LM-5060

	X-152M	833400	Single spear bale spear for Manitou. Single 55 mm spear with useable length of 52-inches for round bales. Rated at 3,000 lbs.	259	1,505.00
	X-242M	833415	Dual bolt-in forged spears spaced 34" apart with useable length of 42". Fits Manitou, Rated at 3,800 lbs. For Round Bales	215	1,281.00
	X-326M	833434	Triple bolt-in forged spears spaced 26" apart, useable length of 26". Fits Manitou Rated at 3,000 lbs. For Mid-size square bales.	212	1,505.00
	X-342M	833430	Triple bolt-in forged spears spaced 26" apart, useable length of 42". Fits Manitou Rated at 4,000 lbs. For large square bales.	235	1,617.00
	X-642M	833445	Transport two 6' diameter bales at once Frame size 76"x 24" w/ 4-bolt-in spears, useable length 42" for Manitou	298	1,463.00

Hay Handling Attachments

Designed for Select Wheel Loaders					
Manufactured to interface with Select John Deere Wheel Loader Mounts					
John Deere Wheel Loaders					
For Models JD Models 244J & 304J					
Product	Model	Item #	Description	Lbs.	List
	X-152JDWL	833560	Single spear bale spear for JD Wheel Loader. Single 55 mm spear with useable length of 52-inches for round bales. Rated at 3,000 lbs.	274	1,547.00
	X-242JDWL	833565	Dual bolt-in forged spears spaced 34" apart, with useable length of 42". Fits JD Wheel Loader Rated at 3,800 lbs. For round bale	230	1,337.00
	X-326JDWL	833570	Triple bolt-in forged spears spaced 26" apart, useable length of 26". Fits JD Wheel Loader Rated at 3,000 lbs. Mid-size square bales.	227	1,547.00
	X-342JDWL	833574	Triple bolt-in forged spears spaced 26" apart, useable length of 42". For JD Wheel Loader Rated at 4,000 lbs. For large square bales.	250	1,659.00
	X-642JDWL	833575	Transport two 6' diameter bales at once Frame size 76"x 24" w/ 4-bolt-in spears, useable length 42" Rate at 6,000 lbs.	315	1,477.00
Designed for Telehandlers & Wheel Loader					
Manufactured to use "Universal" Skid Steer Style Mount					
Product	Model	Item #	Description	Lbs.	List
	X-152SS	833410	Single spear bale spear for Telehandler & Wheel Loaders with Skid Steer Mount Single 55 mm spear with useable length of 52-inches for round bales. Rated at 3,000 lbs.	191	1,645.00
	X-242SS	833425	Dual bolt-in forged spears spaced 34" apart, with useable length of 42". For Telehandlers & Wheel Loaders with Skid Steer Mount Rated at 3,800 lbs. For round bale	147	1,253.00
	X-326SS	833440	Triple bolt-in forged spears spaced 26" apart, useable length of 26". For Telehandlers & Wheel Loaders with Skid Steer Mount Rated at 3,000 lbs. Mid-size square bales.	158	1,442.00
	X-342SS	833444	Triple bolt-in forged spears spaced 26" apart, useable length of 42". Fits Telehandlers & Wheel Loaders with Skid Steer Mount Rated at 4,000 lbs. For large square bales.	179	1,554.00
	SSDBH-6000	834260	Transport two 6' diameter bales at once Frame size 76"x 24" w/ 4-bolt-in spears, useable length 42" Fits Telehandlers & Wheel Loaders with Skid Steer Mount Rated at 6,000 lbs.	244	1,463.00

Hay Handling attachments

Replacement Spears				
Model	Item #	Description	Lbs	List
	831290	1,800 lbs. replacement <u>spear and nut only</u> . 49" long (44" useable). Spear is tapered for use with Conus II tapered sleeve.	21	112.00
	831273	2,200 lbs. replacement <u>spear and nut only</u> . 49" long. (44" useable) Spear is tapered for use with Conus II tapered sleeve.	17	139.00
	830928	2,200 lbs. Bolt-in (42mm dia.) replacement spear only. 47" long. (42" useable length)	21	139.00
	830924	2,200 lbs. 31.5" long Bolt-in (42mm dia.) replacement spear with useable length of 26"	12	119.00
	831268	55mm diameter bolt-in spear, 60" overall length	52	301.00
	831180	Boxed Forged replacement spear kit. Complete with nut & sleeve, packaged in a carton. Rated 1,800 lbs. Weld in sleeve (831292, Conus II) is 2" O.D. 49" long (44" useable) spear.	23	175.00
	831190	Boxed Forged replacement spear kit. Complete with nut, sleeve, packaged in a carton. Rated 2,200 lbs. 49" long. (44" useable length) spear. Weld in sleeve (831292, Conus II) is 2" O.D.	20	195.00
	830925	Bolt-on replacements forge spear kit. Includes spear (42mm dia.), mounting plate (for 3" x 3" square tube) and hardware	32	280.00
	832215	Bolt-in replacement spear kit with cast steel socket. Includes 47" spear, (42" useable length) bolt, and casting that welds to your 3"x3" or larger square frame. Spear rated at 2,200 lbs.	29	189.00
	832217	2,200 lbs. Bolt-in replacement spear kit. Includes 47" spear, (42" useable length) sleeve, and bolt. Weld in sleeve (831069) is 2 1/4" O.D.	26	167.00
	832216	Bolt-in replacement spear kit, includes 31.5" spear (26" useable), sleeve, & bolt. Weld-in sleeve is 2 1/4" O.D.	21	147.00
	832214	Bolt-in replacement spear kit with weld-on cast steel socket (Pat.Pend.) Includes 31.5" (26" useable) spear, bolt and casting that welds to your 3" x 3" or larger square frame. Rated at 2200 lbs.	21	161.00