





The Athens Model 52 is the perfect choice for compact tractor owners, gardeners, weekenders, and small wildlife food plots. This lift-type tandem disc harrow is available in 6' 6", 7' 0", 7' 1 1", and 8' 2" widths and its compact design allows for easy lifting, straight pulling, and excellent maneuverability.



	ECIFICATION		NCINC STREET			
WIDTH OF CUT	NUMBER OF DISCS	DISC SF FRONT	REAR	NUMBER OF BEARINGS	*APPROX HP	APPROX WEIGHT (lbs.)
6' 6"	16	9"	9"	8	35 - 40	868
7' 0"	18 20	9" 7 ½"	7 ½" 7 ½"	8	40 - 45	938
7' 11"	20	9"	9"	8	45 - 50	982
8' 2"	22 24	9" 7 ½"	7 ½" 7 ½"	8	45 - 55	1021

*Approximate Horse Power (HP) is only a guide. Extremely hard, soft, or boggy conditions will change these figures.

STANDARD EQUIPMENT

- Disc Blades, 18" or 20" Diameter
- Relube Quadraseal Ball Bearings
- I 1/8" Square Cold Rolled Axle
- Spacing, 9", 7 1/2", or 9" Front & 71/2" Rear
- Adjustable Angle of Cut: 15° or 18°
- Gang Wrench
- Cat. I Hitch Free Link

OPTIONAL EQUIPMENT

- Scrapers
- Cover Discs
- Cat. II Hitch Free Link

DISC BLADES

Available in 18" and 20" diameter sizes. Choose between Smooth or Cutout. Smooth Blades are best utilized in normal field conditions. They are more economical, last longer, weigh more, and wear more evenly, thus staying sharper longer. Cutout blades are more aggressive and trap residue better than smooth blades.



FEATURES

The Main Frame is constructed of ¼" thick steel tubing and ½" thick angle which is truss-braced and reinforced to resist twisting and bending. Compact design allows for easy lifting, straight pulling, and excellent maneuverability in small fields and around close obstacles.

Axles are made from 11/8" square cold rolled steel to insure straightness and to keep bearings and disc in alignment.

Gang Frames are constructed from 3 x 3 x ¹/₄" structural steel tubing.


Flangette Ball Bearings on the 52 are greaseable and have triple lip seals.

Angle of Cut adjustments can be made from 15° to 18° depending on your need for penetration and aggression.

Athens Plow Co., Inc. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified. Athens Plow Co., Inc. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.



EATHENSE MOUNTED DISK HARROW

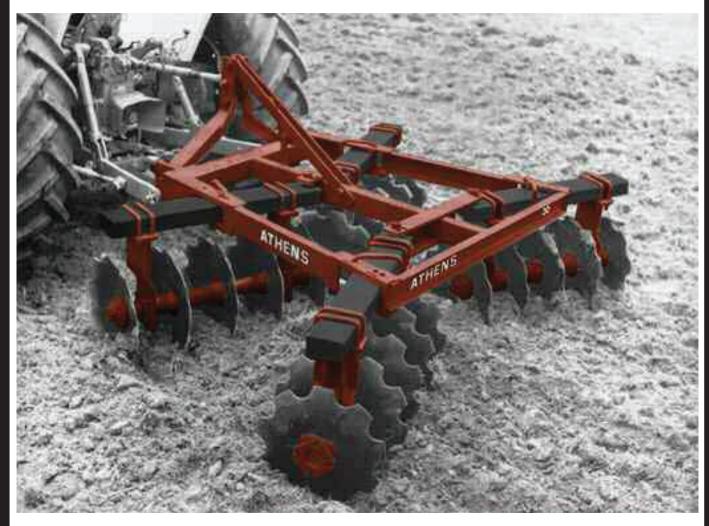

When it comes to rugged dependability and unsurpassed field performance, the Athens "55" is tops in its class!

This brawny, fully-mounted tandem has the weight (average 55# per disk) and strength to chop through stalks and stubble with ease...Plus quick and easy adjustments to provide excellent incorporation and seedbed finishing.





55 MOUNTED DISK HARROWS



SPECIFICATIONS

Width of Cut	No. of Disks *	Approx. Weight
6′6″	16	1104
7′0″	18/20*	1188
7′ 11″	20	1242
8′2″	22/24*	1321
9′4″	24/26/28*	1456
* Number	of dialso years	with the ease

* Number of disks vary with the combination of spacing $7\frac{1}{2}$ ", 9", or 9" front and $7\frac{1}{2}$ " rear.

STANDARD EQUIPMENT:

- Category II Hitch
- 1 1/8" Cold Rolled Square Steel Axle
- Disk Gang Wrench
- Tapered Outside Rear Disk Gangs
- Adjustable Angle of Cut
- Flangette Bearing Hangers
- Relube Ball Bearings

OPTIONAL EQUIPMENT:

- Category I or II Hitch
- 20" or 22" Disk Blades Cut Out or Smooth
- Disk Spacing-7½", 9" or 9" Front and 7½" Rear

EXTRA EQUIPMENT:

- Heavy Duty Scraper Blades
- Balk Buster
- Cover Disk

FEATURES

RUGGED 3" x 5" **GANG FRAME TUBES.** Provides rigid support for bearing hangers and gang components.

HEAVY-DUTY BEARING HANGERS. Rigid bearing hangers hold bearings in PERFECT alignment and assure gang rigidity for free turning disks. Hangers are secured to gang frames with heavy duty $5/_8$ " U bolts.

RELUBE BALL BEARINGS.

The bearings are shroud protected, heavy-duty, flangette type and have triple lip seals.

FACTORY ASSEMBLED GANGS.

Gangs are tightened to 750 foot pounds, and locked securely with slotted nuts and cotter pins.

ADJUSTING ANGLE OF CUT.

Adjusting is fast and easy from 13° to 21° in 4° increments to provide deeper penetration and more aggressive cutting and mixing action. Gangs adjust individually without tools by removing only one pin per gang. Disk gangs can be shim-leveled individually sideto-side.

CHOICE OF DISKS.

You may chose from 20" or 22" disk blades in either smooth or cut out. All are high quality alloy steel for long life.

SPACER AND BEARING SPOOLS.

Made from high strength cast iron to exacting specifications. The large flanged ends support more disk area and are arbor machined to assure a snug fit and precise bearing alignment.

FRAME DESIGN.

Compact, close-coupled design allows easy lifting, straight pulling, and excellent maneuverability in small fields and around close obstacles.

EXTRA EQUIPMENT FEATURES SCRAPERS.

Heavy-duty scraper arms and knifetype blades provide maximum cleaning and clearance of trash.

COVER DISKS.

Easily bolts on to outside rear gangs to remove ridges and furrows left by the front gang.

BALK BUSTER.

Bolts on to main frame between the front gangs to cut out the ridge normally left between the front gangs. Made of $\frac{3}{4}$ " x 2" alloy steel.

UNITIZED FRAME.

Constructed from 4'' channel and $4'' \times 4''$ steel tubing. Reinforced and truss braced to resist twisting and bending loads.

ATHENS PLOW CO., INC. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified. ATHENS PLOW CO., INC. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.





The Model 65 is ideal for wildlife applications and management. This lift-type tandem disc harrow is available in 8' 0", 8' 4", and 9' 6" widths making it the perfect choice for plantations and ranches.





STANDARD EQUIPMENT

- Disc Blades, 22" or 24" Diameter
- Relube Quadraseal Ball Bearings
- Rigid Bearing Hangers with Wear Plates
- I.25" Square Cold Rolled Axle
- Spacing, 9" or 9" Front & 7.5" Rear
- Adjustable Angle of Cut: 15°, 18° or 21°
- Gang Wrench

OPTIONAL EQUIPMENT

- Spring Bearing Hangers with Wear Plates
- Scrapers
- Cover Discs
- Balk Buster



Quadraseal Ball Bearings Strong relube QUADRASEAL ball bearings on the Model 65 mean long life and less downtime.



DISC BLADES

Available in 22 and 24 inch sizes. Athens Plow offers tailored solutions to meet your disking needs.

Smooth blades are best utilized in normal field conditions. They are more economical, wear longer, weigh more than cutout blades, and cut crop residue evenly.

Cutout blades are more aggressive and trap residue better than smooth blades.

MODEL 65 SPECIFICATIONS

WIDTH OF CUT	NUMBER OF DISCS	DISC SF FRONT	ACING REAR	NUMBER OF BEARINGS	*APPROX. DBHP	APPROX. WEIGHT (lbs.)
8' 0"	20	9"	9 "	8	70	1,700
8' 4"	22	9"	7.5"	8	75	1,800
9' 6"	24	9"	9"	8	85	2,000
90	26	9 "	7.5"	•	05	2,000
*Approximate	Draw Bar Hor	se Power is	only a gu	ide.		

Extremely hard, soft, hilly or boggy conditions will change these figures



Versatility: The Hitch on the Model 65 is designed to adapt to a Category II Free Link or a Category II Quick Hitch.



The Rigid Bearing Hanger features a Wear Plate that bolts onto the front-side of the Bearing Hanger adding extra protection to the front and bottom of the Bearing Housing.



The Spring Bearing Hanger provides maximum strength without sacrificing flexibility. It also features a Wear Plate which protects the front and bottom of the Bearing Housing.

Athens Plow Co., Inc. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified. Athens Plow Co., Inc. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.



ATHENS MODEL 97

HENS

The Model 97 is ideal for wildlife applications and management. This lift-type offset disc harrow is available in widths from 6' 2" to 9' 0", making it the perfect choice for plantations and ranches.



"WE PLOW THE EARTH"



STANDARD EQUIPMENT

- Disc Blades, 22" or 24" Diameter
- 9" Spacing
- Relube Quadraseal Ball Bearings
- Rigid Bearing Hangers with Wear Plates
- 1.25" Square Cold Rolled Axle
- Adjustable Angle of Cut: 18° or 21°
- Gang Wrench

OPTIONAL EQUIPMENT

- Spring Bearing Hangers with Wear Plates
- Scrapers
- Cover Discs



Quadraseal Ball Bearings Strong relube QUADRASEAL ball bearings on the Model 97 mean long life and less downtime.



DISC BLADES

Available in 22 and 24 inch sizes. Athens Plow offers tailored solutions to meet your disking needs.

Smooth blades are best utilized in normal field conditions. They are more economical, wear longer, weigh more than cutout blades, and cut crop residue evenly.

Cutout blades are more aggressive and trap residue better than smooth blades.



P PROX. GHT (lbs.)	*APPROX. HORSE POWER W	NUMBER OF BEARINGS	NUMBER OF DISCS	WIDTH OF CUT
1,385	50 - 60	6	16	6' 2"
1,565	60 - 70	8	18	6' 10"
1,672	70 - 80	8	20	7' 6"
		СН	RAME - CAT. II/III HIT	WIDE MAIN FR
1,798	80 - 90	8	22	8' 4"
1,898	90 - 100	8	24	9' 0"
ż	90 - 100	8	24 Horse Power is only a	9' 0" *Approximate H

Extremely hard, soft, hilly or boggy conditions will change these figures



The Top-Hitch Brace

on the Model 97 adds strength and durability to the hitch. Designed with a 1.5" diameter rod and a heavy duty spring, this brace is built to last.



The Rigid Bearing Hanger features a Wear Plate that bolts onto the front-side of the Bearing Hanger adding extra protection to the front and bottom of the Bearing Housing.




The Spring Bearing Hanger provides maximum strength without sacrificing flexibility. It also features a Wear Plate which protects the front and bottom of the Bearing Housing.

Athens Plow Co., Inc. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified. Athens Plow Co., Inc. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.





ATHENS BBD5/BBD6 LIFT-TYPE DISK HARROW



SPECIFICATIONS:

Cutting Width 5' 0" & 6' 6" Disc Spacing 9" Disc Diameter 22" C/O Tapered Cat. II Free Link or Quick Coupler Relube Ball Bearings Rigid or Spring Bearing Hangers 1 ¹/₄" Cold Rolled Square Gang Axle with Gang Wrench Adjustable Angle of Cut 15° and 18° Heavy Duty Scrapers Balk Buster

Model Number	Disc Diam	TYPE OF DISC	Disc Thick	# OF DISC	DISC Spacing	# OF Brgs	APX WT (LBS)	Sugst Price
<u>5' 0" Wide</u>								
BBD5-0827-65T	22" Tap	C/O	.197	8	9"	4	985	\$5,046
<u>6' 6'' Wide</u>								
BBD6-1027-65T	22" Tap	C/O	.197	10	9"	4	1017	\$5,373.60

OPTIONAL EQUIPMENT


For Spring Bearing Hangers: Change the 8th Digit from 7 to 6 and add 15# and \$38.40 per Bearing to Weights and Prices.



Prices Effective as of 8-22

PLOW COMPANY

ATHENS 37 LIFT TYPE DISK HARROW

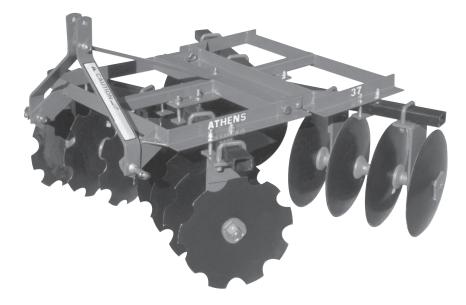

SPECIFICATIONS:

Cutting Width – 5'2" to 6'5" Disc Spacing – 7", 9", or 9"F/7"R Discs – 18" Diameter – CO / SM

STANDARD EQUIPMENT:


Category I Hitch Adjustable Angle of Cut 1" High Carbon Steel Square Axles Factory Assembled Gangs Triple-Lip Sealed Ball Bearings

MODEL NUMBER	DISK DIAM	<u>TYPE O</u> FRNT	<u>F DISK</u> REAR	DISK THCK	# OF DISK	<u>DISK SP</u> FRNT	ACING REAR	# OF BRGS	APX WT	SUGST <u>PRICE</u>
<u>5'2" WIDE</u>										
037-1611-010 037-1611-110	18 18	C.O. SM.	C.O. SM.	.118 .118	16 16	7" 7"	7" 7"	8 8	624 640	\$2,150.40 \$2,144.40
037-1611-410 6'3" WIDE	18	C.O.	SM.	.118	16	7"	7"	8	632	\$2,134.80
037-1621-010	18	C.O.	C.O.	.118	16	9"	9"	8	654	\$2,193.60
037-1621-110 037-1621-410	18 18	SM. C.O.	SM. SM.	.118 .118	16 16	9" 9"	9" 9"	8 8	670 662	\$2,150.40 \$2,173.20
<u>6'5"WIDE</u>										
037-1831-010	18	C.O.	C.O.	.118	18	9" 9"	7" 7"	8	680	\$2,286
037-1831-110 037-1831-410	18 18	SM. C.O.	SM. SM.	.118 .118	18 18	9"	7" 7"	8 8	698 690	\$2,248.80 \$2,268
037-2011-010 037-2011-110	18 18	C.O. SM.	C.O. SM.	.118 .118	20 20	7" 7"	7" 7"	8 8	702 722	\$2,382 \$2,346
037-2011-410	18	C.O.	SM.	.118	20	7"	7"	8	712	\$2,361.60





ATHENS 47 LIFT TYPE DISK HARROW

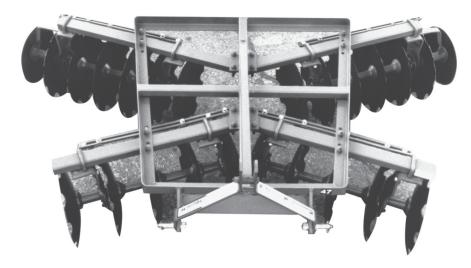

<u>SPECIFICATIONS:</u> Cutting Width – 6'3" to 7'9" Disk Spacing – 7", 9", or 9"F/7"R 18" or 20" Disks – CO/SM

STANDARD EQUIPMENT:

Category I Hitch Adjustable Angle of Cut 1" High Carbon Square Axles Factory Assembled Gangs Triple Lip Sealed Ball Bearings

MODEL	DISK	<u>TYPE O</u>	<u>F DISK</u>	DISK	# OF	<u>DISK SP</u>	<u>ACING</u>	# OF	APX	SUGST
<u>NUMBER</u>	<u>DIAM</u>	FRNT	REAR	<u>THCK</u>	<u>DISK</u>	FRNT	REAR	<u>BRGS</u>	<u>WT</u>	<u>PRICE</u>
<u>6'3" WIDE</u>										
047-1621-010	18"	C.O.	C.O.	.118	16	9"	9"	8	664	\$2,292
047-1621-020	20"	C.O.	C.O.	.138	16	9"	9"	8	712	\$2,475.60
047-1621-110	18"	SM.	SM.	.118	16	9"	9"	8	680	\$2,214
047-1621-120	20"	SM.	SM.	.118	16	9"	9"	8	712	\$2,408.40
047-1621-410	18"	C.O.	SM.	.118	16	9"	9"	8	672	\$2,248.80
047-1621-420	20"	C.O.	SM.	.138	16	9"	9"	8	712	\$2,442
<u>6'5" WIDE</u>										
047-1831-010	18"	C.O.	C.O.	.118	18	9"	7"	8	690	\$2,400
047-1831-020	20"	C.O.	C.O.	.138	18	9"	7"	8	744	\$2,623.20
047-1831-110	18"	SM.	SM.	.118	18	9"	7"	8	708	\$2,264.40
047-1831-120	20"	SM.	SM.	.118	18	9"	7"	8	744	\$2,410.80
047-1831-410	18"	C.O.	SM.	.118	18	9"	7"	8	700	\$2,332.80
047-1831-420	20"	C.O.	SM.	.138	18	9"	7"	8	744	\$2,526
047-2011-010	18"	C.O.	C.O.	.118	20	7"	7"	8	712	\$2,472
047-2011-020	20"	C.O.	C.O.	.138	20	7"	7"	8	772	\$2,757.60
047-2011-110	18"	SM.	SM.	.118	20	7"	7"	8	732	\$2,367.60
047-2011-120	20"	SM.	SM.	.118	20	7"	7"	8	772	\$2,524.80
047-2011-410	18"	C.O.	SM.	.118	20	7"	7"	8	722	\$2,419.20
047-2011-420	20"	C.O.	SM.	.138	20	7"	7"	8	772	\$2,643.60





\$225.60

\$237.60

MODEL <u>NUMBER</u>	DISK <u>DIAM</u>	<u>TYPE (</u> FRNT	<u>DF DISK</u> REAR	DISK <u>THCK</u>	# OF <u>DISK</u>	<u>DISK SI</u> FRNT	<u>PACING</u> REAR	# OF <u>BRGS</u>	APX <u>WT</u>	SUGST <u>PRICE</u>
<u>7'6''WIDE</u>										
047-2231-010	18"	C.O.	C.O.	.118	22	9"	7"	8	762	\$2,662.80
047-2231-020	20"	C.O.	C.O.	.138	22	9"	7"	8	828	\$2,928
047-2231-110	18"	SM.	SM.	.118	22	9"	7"	8	784	\$2,502
047-2231-120	20"	SM.	SM.	.118	22	9"	7"	8	828	\$2,673.60
						9 9"	7 7"			
047-2231-410	18"	C.O.	SM.	.118	22	-		8	773	\$2,572.80
047-2231-420	20"	C.O.	SM.	.138	22	9"	7"	8	828	\$2,700
047-2411-010	18"	C.O.	C.O.	.118	24	7"	7"	8	782	\$2,754
047-2411-020	20"	C.O.	C.O.	.138	24	7"	7"	8	854	\$3,042
047-2411-110	18"	SM.	SM.	.118	24	7"	7"	8	806	\$2,575.60
047-2411-120	20"	SM.	SM.	.118	24	7"	7"	8	854	\$2,760
047-2411-410	18"	C.O.	SM.	.118	24	7"	7"	8	794	\$2,664
047-2411-420	20"	C.O.	SM.	.138	24	7"	7"	8	854	\$2,901.60
<u>7'9" WIDE</u>										
047-2021-010	18"	C.O.	C.O.	.118	20	9"	9"	8	737	\$2,472
047-2021-020	20"	C.O.	C.O.	.138	20	9"	9"	8	797	\$2,716.80
047-2021-020	18"	SM.	SM.	.118	20	9"	9"	8	757	\$2,329.20
047-2021-120	20"	SM.	SM.	.118	20	9"	9"	8	797	\$2,482.80
						9 9"	9 9"			
047-2021-410 047-2021-420	18" 20"	C.O. C.O.	SM. SM.	.118 .138	20 20	9" 9"	9" 9"	8 8	747 797	\$2,398.80 \$2,602.80
									APX	SUGST
EXTRA EQUIPM	ENT			WII	<u>DTH</u>	<u>,</u>	SPACING		WT	PRICE
9-047-916210	SCRAI	PERS		6'3"	,	()"		48#	\$192
9-047-918310	SCRAI			6'5"		í	9"F,7"R		50#	\$195.60
9-047-920110	SCRAI			6'5"			7"		53#	\$212.40
9-047-920210	SCRAI	DEDS		7'9''	,	()"		57#	\$222
9-04/-920210	SURAL			19					51#	$\varphi \angle \angle \angle$

 9-047-920210
 SCRAPERS
 7'9"
 9"
 57#

 9-047-922310
 SCRAPERS
 7'6"
 9"F,7"R
 61#

 9-047-924110
 SCRAPERS
 7'6"
 7"
 63#



ATHENS 52 LIFT-TYPE TANDEM DISK HARROW





SPECIFICATIONS:

Cutting Width 6' 6", 7' 0", 7' 11", and 8' 2" Disc Spacing 7 ¹⁄₂", 9", or 9" F and 7 ¹⁄₂" R Disc Diameter 18" or 20" C/O or SM Cat. I Free Link Relube Ball Bearings Flangette Bearing Hangers 1 ¹⁄₈" Cold Rolled Square Gang Axle with Gang Wrench Adjustable Angle of Cut 15° and 18° Heavy Duty Scrapers (Extra Equipment) Cover Discs (Extra Equipment)

MODEL	DISC		OF DISC	DISC	# OF		PACING	# OF	Apx	SUGST
NUMBER	Dia	Frt	Rear	THICK	DISC	Frt	Rear	Brgs	WT (LBS)	PRICE
<u>6' 6" Wide</u>										
052-1622-211	18"	C/O	C/O	.138	16	9"	9"	8	823	\$3,382.80
052-1622-311	18"	SM	SM	.138	16	9"	9"	8	855	\$3,312
052-1622-511	18"	C/O	SM	.138	16	9"	9"	8	839	\$3,339.60
052-1622-221	20"	C/O	C/O	.148	16	9"	9"	8	868	\$3,620.40
052-1622-321	20"	SM	SM	.148	16	9"	9"	8	904	\$3,555.60
052-1622-521	20"	C/O	SM	.148	16	9"	9"	8	886	\$3,574.80
<u>7' 0'' Wide</u>										
052-1832-211	18"	C/O	C/O	.138	18	9"	7 1⁄2"	8	872	\$3,536.40
052-1832-311	18"	SM	SM	.138	18	9"	7 1⁄2"	8	908	\$3,442.80
052-1832-511	18"	C/O	SM	.138	18	9"	7 1⁄2"	8	892	\$3,498
052-1832-221	20"	C/O	C/O	.148	18	9"	7 1⁄2"	8	922	\$3,810
052-1832-321	20"	SM	SM	.148	18	9"	7 1⁄2"	8	962	\$3,685.20
052-1832-521	20"	C/O	SM	.148	18	9"	7 1⁄2"	8	944	\$3,746.40
052-2012-211	18"	C/O	C/O	.138	20	7 1⁄2"	7 1⁄2"	8	898	\$3,696
052-2012-311	18"	SM	SM	.138	20	7 1⁄2"	7 1⁄2"	8	938	\$3,584.40
052-2012-511	18"	C/O	SM	.138	20	7 1⁄2"	7 1⁄2"	8	918	\$3,651.60
052-2012-221	20"	C/O	C/O	.148	20	7 1⁄2"	7 1⁄2"	8	954	\$3,996
052-2012-321	20"	SM	SM	.148	20	7 1/2"	7 1/2"	8	998	\$3,855.60
052-2012-521	20"	C/O	SM	.148	20	7 1⁄2"	7 1⁄2"	8	976	\$3,921.60





Model	Disc	Type o	OF DISC	Disc	# OF	Disc S	PACING	# OF	Apx	Sugst
Number	Diam	Frt	REAR	Thick	DISC	Frt	REAR	Brgs	Wt	Price
<u>7'11" Wide</u>										
052-2022-211	18"	C/O	C/O	.138	20	9"	9"	8	926	\$3,954
052-2022-311	18"	SM	SM	.138	20	9"	9"	8	966	\$3,702
052-2022-511	18"	C/O	SM	.138	20	9"	9"	8	946	\$3,780
052-2022-221	20"	C/O	C/O	.148	20	9"	9"	8	982	\$4,117.20
052-2022-321	20"	SM	SM	.148	20	9"	9"	8	1026	\$3,978
052-2022-521	20"	C/O	SM	.148	20	9"	9"	8	1004	\$4,056
<u>8' 2'' Wide</u>										
052-2232-211	18"	C/O	C/O	.138	22	9"	7 ¹ /2"	8	946	\$3,952.80
052-2232-311	18"	SM	SM	.138	22	9"	7 ¹ /2"	8	990	\$3,855.60
052-2232-511	18"	C/O	SM	.138	22	9"	7 ¹ /2"	8	970	\$3,915.60
052-2232-221	20"	C/O	C/O	.148	22	9"	7 ½"	8	1008	\$4,302
052-2232-321	20"	SM	SM	.148	22	9"	7 ½"	8	1057	\$4,152
052-2232-521	20"	C/O	SM	.148	22	9"	7 ½"	8	1035	\$4,227.60
052-2412-211	18"	C/O	C/O	.138	24	7 ½"	7 ¹ / ₂ "	8	966	\$4,130.40
052-2412-311	18"	SM	SM	.138	24	7 ½"	7 ¹ / ₂ "	8	1014	\$3,998.40
052-2412-511	18"	C/O	SM	.138	24	7 ½"	7 ¹ / ₂ "	8	990	\$4,059.60
052-2412-221	20"	C/O	C/O	.148	24	7 ½"	7 ½"	8	1033	\$4,489.20
052-2412-321	20"	SM	SM	.148	24	7 ½"	7 ½"	8	1086	\$4,272
052-2412-521	20"	C/O	SM	.148	24	7 ½"	7 ½"	8	1060	\$4,416

EXTRA EQUIPMENT

SCRAPERS	Width	SPACING	APPROX. WEIGHT	SUGST PRICE
9-052-916220	6' 6"	9"	122#	\$412.80
9-052-918320	7' 0''	9" F / 7 ½" R	131#	\$462
9-052-920120	7' 0''	7 1/2"	140#	\$484.80
9-052-920220	7'11"	9"	147#	\$534
9-052-922320	8' 2"	9" F / 7 ½" R	157#	\$567.60
9-052-924120	8' 2"	7 1/2"	166#	\$604.80
COVER DISCS	DESCRIPTION		APX. WEIGHT	SUGST PRICE
9-052-700016	Cover Discs w/	o Scraper w/ 16" Disc	34#	\$202.80
9-052-709016	Cover Discs w/	Scraper w/ 16" Disc	43#	\$236.40

OPTIONAL EQUIPMENT

TO SPECIFY CAT. II IN LIEU OF CAT I, CHANGE THE 10TH DIGIT FROM 1 TO 2. NO CHARGE



ATHENS 55 LIFT TYPE DISK HARROW





SPECIFICATIONS:

Cutting Width 6'6" to 10'9" Disk spacing 7-1/2", 9" or 9" Front, 7-1/2" Rear 20" or 22" Disks – Cutout or Smooth Heavy Duty Scrapers (Extra Equip.) Category I or II Hitch Relube Ball Bearings

STANDARD EQUIPMENT:

Category II Hitch 1-1/8" Cold Rolled Square Axles W/Wrench Tapered Outside Rear Disk Gangs Factory Assembled Gangs Adjustable Angle of Cut Flangette Bearing Hangers Relube Ball Bearings

MODEL	DISK	<u>TYPE C</u>	<u>PF DISK</u>	DISK	# OF	<u>DISK SF</u>	P <u>ACING</u>	# OF	APX	SUGST
<u>NUMBER</u>	<u>DIAM</u>	FRNT	REAR	<u>THCK</u>	<u>DISK</u>	FRNT	REAR	<u>BRGS</u>	<u>WT</u>	<u>PRICE</u>
<u>6'6" WIDE</u>										
055-1622-222	20"	C.O.	C.O.	.138	16	9"	9"	8	1006	\$4,192.80
055-1622-642	22"	C.O.	C.O.	.177	16	9"	9"	8	1054	\$4,444.80
055-1622-322	20"	SM.	SM.	.138	16	9"	9"	8	1024	\$4,112.40
055-1622-742	22"	SM.	SM.	.177	16	9"	9"	8	1072	\$4,377.60
055-1622-522	20"	C.O.	SM.	.138	16	9"	9"	8	1014	\$4,143.60
055-1622-842	22"	C.O.	SM.	.177	16	9"	9"	8	1063	\$4,395.60
<u>7'0" WIDE</u>										
055-1832-222	20"	C.O.	C.O.	.138	18	9"	7-1/2"	8	1039	\$4,356
055-1832-642	22"	C.O.	C.O.	.177	18	9"	7-1/2"	8	1096	\$4,647.60
055-1832-322	20"	SM.	SM.	.138	18	9"	7-1/2"	8	1058	\$4,254
055-1832-742	22"	SM.	SM.	.177	18	9"	7-1/2"	8	1117	\$4,514.40
055-1832-522	20"	C.O.	SM.	.138	18	9"	7-1/2"	8	1049	\$4,315.20
055-1832-842	22"	C.O.	SM.	.177	18	9"	7-1/2"	8	1108	\$4,580.40
055-2012-222	20"	C.O.	C.O.	.138	20	7-1/2"	7-1/2"	8	1072	\$4,525.20
055-2012-642	22"	C.O.	C.O.	.177	20	7-1/2"	7-1/2"	8	1138	\$4,846.80
055-2012-322	20"	SM.	SM.	.138	20	7-1/2"	7-1/2"	8	1092	\$4,408.80
055-2012-742	22"	SM.	SM.	.177	20	7-1/2"	7-1/2"	8	1161	\$4,696.80
055-2012-522	20"	C.O.	SM.	.138	20	7-1/2"	7-1/2"	8	1081	\$4,479.60
055-2012-842	22"	C.O.	SM.	.177	20	7-1/2"	7-1/2"	8	1149	\$4,767.60





MODEL	DISK	<u>TYPE O</u>	<u>F DISK</u>	DISK	# OF	<u>DISK SI</u>	P <u>ACING</u>	# OF	APX	SUGST
<u>NUMBER</u>	<u>DIAM</u>	FRNT	REAR	<u>THCK</u>	<u>DISK</u>	FRNT	REAR	<u>BRGS</u>	<u>WT</u>	<u>PRICE</u>
<u>7'11"WIDE</u>										
055-2022-222	20"	C.O.	C.O.	.138	20	9"	9"	8	1125	\$4,800
055-2022-642	22"	C.O.	C.O.	.177	20	9"	9"	8	1192	\$4,975.20
055-2022-322	20"	SM.	SM.	.138	20	9"	9"	8	1146	\$4,532.40
055-2022-742	22"	SM.	SM.	.177	20	9"	9"	8	1215	\$4,828.80
055-2022-522	20"	C.O.	SM.	.138	20	9"	9"	8	1135	\$4,615.20
055-2022-842	22"	C.O.	SM.	.177	20	9"	9"	8	1203	\$4,911.60
8'2"WIDE										
055-2232-222	20"	C.O.	C.O.	.138	22	9"	7-1/2"	8	1155	\$4,800
055-2232-642	22"	C.O.	C.O.	.177	22	9"	7-1/2"	8	1232	\$5,175
055-2232-322	20"	SM.	SM.	.138	22	9"	7-1/2"	8	1179	\$4,696.80
055-2232-742	22"	SM.	SM.	.177	22	9"	7-1/2"	8	1257	\$4,012.40
055-2232-522	20"	C.O.	SM.	.138	22	9"	7-1/2"	8	1168	\$4,761.60
055-2232-842	22"	C.O.	SM.	.177	22	9"	7-1/2"	8	1245	\$5,094
055-2412-222	20"	C.O.	C.O.	.138	24	7-1/2"	7-1/2"	8	1185	\$4,989.60
055-2412-642	22"	C.O.	C.O.	.177	24	7-1/2"	7-1/2"	8	1271	\$5,374.80
055-2412-322	20"	SM.	SM.	.138	24	7-1/2"	7-1/2"	8	1211	\$4,851.60
055-2412-742	22"	SM.	SM.	.177	24	7-1/2"	7-1/2"	8	1299	\$5,140.80
055-2412-522	20"	C.O.	SM.	.138	24	7-1/2"	7-1/2"	8	1198	\$4,916.40
055-2412-842	22"	C.O.	SM.	.177	24	7-1/2"	7-1/2"	8	1285	\$5,294.40
<u>9'4"WIDE</u>										
055-2422-222	20"	C.O.	C.O.	.138	24	9"	9"	8	1249	\$4,960.80
055-2422-642	22"	C.O.	C.O.	.177	24	9"	9"	8	1335	\$5,355.60
055-2422-322	20"	SM.	SM.	.138	24	9"	9"	8	1275	\$4,824
055-2422-742	22"	SM.	SM.	.177	24	9"	9"	8	1363	\$5,172
055-2422-522	20"	C.O.	SM.	.138	24	9"	9"	8	1262	\$4,905.60
055-2422-842	22"	C.O.	SM.	.177	24	9"	9"	8	1349	\$5,264.40
055-2632-222	20"	C.O.	C.O.	.138	26	9"	7-1/2"	8	1289	\$5,140.80
055-2632-642	22"	C.O.	C.O.	.177	26	9"	7-1/2"	8	1385	\$5,556
055-2632-322	20"	SM.	SM.	.138	26	9"	7-1/2"	8	1317	\$4,980
055-2632-742	22"	SM.	SM.	.177	26	9"	7-1/2"	8	1415	\$5,358
055-2632-522	20"	C.O.	SM.	.138	26	9"	7-1/2"	8	1304	\$5,058
055-2632-842	22"	C.O.	SM.	.177	26	9"	7-1/2"	8	1401	\$5,456.40
055-2812-222	20"	C.O.	C.O.	.138	28	7-1/2"	7-1/2"	8	1301	\$5,299.20
055-2812-642	22"	C.O.	C.O.	.177	28	7-1/2"	7-1/2"	8	1406	\$5,758.80
055-2812-322	20"	SM.	SM.	.138	28	7-1/2"	7-1/2"	8	1331	\$5,140.80
055-2812-742 055-2812-522 055-2812-842	22" 20" 22"	SM. C.O. C.O.	SM. SM. SM.	.177 .138 .177	28 28 28 GENEI	7-1/2" 7-1/2" 7-1/2" RAL	7-1/2" 7-1/2" 7-1/2"	8 8 8	1439 1316 1422	\$5,548.80 \$5,229.60 \$5,661.60





EXTRA EQUIF	PMENT	WIDTH	SPACING	APX <u>WT</u>	SUGST <u>PRICE</u>
9-055-916220 9-055-918320 9-055-920120 9-055-920220	SCRAPERS SCRAPERS SCRAPERS SCRAPERS	6'6'' 7'0'' 7'0'' 7'11''	9" 9"F7-1/2"R 7-1/2" 9"	122# 131# 140# 147#	\$444 \$495.60 \$518.40 \$572.40
9-055-922320 9-055-924120 9-055-924220 9-055-926320 9-055-928120	SCRAPERS SCRAPERS SCRAPERS SCRAPERS SCRAPERS	8'2" 8'2" 9'4" 9'4"	9"F7-1/2"R 7-1/2" 9" 9"F7-1/2"R 7-1/2"	157# 166# 175# 184# 193#	\$604.80 \$648 \$648 \$674.40 \$715.20

EXTRA EQU	IPMENT	APX <u>WT</u>	SUGST <u>PRICE</u>
9-055-709016	COVER DISK W/O SCRAPER W/16" DISK	34#	\$216
	COVER DISK W/ SCRAPERS W/16" DISK	43#	\$252
	BALK BUSTER	38#	\$216


OPTIONAL EQUIPMENT:

TO SPECIFY CAT. #1 IN LIEU OF CAT.#II, CHANGE	NO CHARGE
10 TH DIGIT FROM 2 TO 1	NUCHARGE



ATHENS 65 LIFT-TYPE TANDEM DISK HARROW



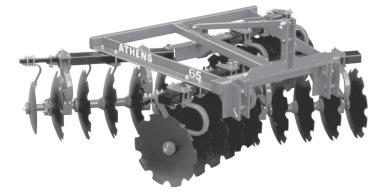

SPECIFICATIONS:

Cutting Width 8'0", 8'4", and 9'6" Disc Spacing 9", or 9" Front – 7 ½" Rear Disc Diameter 22" or 24" Rigid or Spring Bearing Hangers Cat. II Free Link/Quick Coupler Relube Ball Bearings 1 ¼" Cold Rolled Square Gang Axle with Gang Wrench

MODEL	DISK	<u>TYPE C</u>	<u>PF DISK</u>	DISK	# OF	<u>DISK SI</u>	<u>PACING</u>	# OF	APX	SUGST
<u>NUMBER</u>	<u>DIAM</u>	FRNT	REAR	<u>THCK</u>	<u>DISK</u>	FRNT	REAR	<u>BRGS</u>	<u>WT</u>	<u>PRICE</u>
<u>8'0" WIDE</u>										
065-2027-650	22"	C.O.	C.O.	.197	20	9"	9"	8	1710	\$6,840
065-2027-660	24"	C.O.	C.O.	.197	20	9"	9"	8	1770	\$7,226.40
065-2027-750	22"	SM.	SM.	.197	20	9"	9"	8	1730	\$6,804
065-2027-760	24"	SM.	SM.	.197	20	9"	9"	8	1790	\$7,140
065-2027-850	22"	C.O.	SM.	.197	20	9"	9"	8	1720	\$6,822
065-2027-860	24"	C.O.	SM.	.197	20	9"	9"	8	1780	\$7,182
<u>8'4" WIDE</u>										
065-2237-650	22"	C.O.	C.O.	.197	22	9"	7-1/2"	8	1762	\$7,194
065-2237-750	22"	SM.	SM.	.197	22	9"	7-1/2"	8	1784	\$7,149.60
065-2237-850	22"	C.O.	SM.	.197	22	9"	7-1/2"	8	1774	\$7,166.40
<u>9'6" WIDE</u>										
065-2427-650	22"	C.O.	C.O.	.197	24	9"	9"	8	1872	\$7,489.20
065-2427-660	24"	C.O.	C.O.	.197	24	9"	9"	8	1944	\$7,944
065-2427-750	22"	SM.	SM.	.197	24	9"	9"	8	1896	\$7,440
065-2427-760	24"	SM.	SM.	.197	24	9"	9"	8	1968	\$7,845.60
065-2427-850	22"	C.O.	SM.	.197	24	9"	9"	8	1884	\$7,462.80
065-2427-860	24"	C.O	SM.	.197	24	9"	9"	8	1956	\$7,894.80
065-2637-650	22"	C.O.	C.O.	.197	26	9"	7-1/2"	8	1914	\$7,820.40
065-2637-750	22"	SM.	SM.	.197	26	9"	7-1/2"	8	1940	\$7,767.60
065-2637-850	22"	C.O.	SM.	.197	26	9"	7-1/2"	8	1954	\$7,792.80

OPTIONAL EQUIPMENT

For Spring Bearing Hangers: Change the 7th Digit from 7 to 6 and Add 15# And \$38.40 per Bearing Weights and Prices.





EXTRA EQUIP	MENT_	SPACING	APX <u>WT</u>	SUGST <u>PRICE</u>
SCRAPERS				
9-065-920270 *9-065-920260	Scrapers for 8'0" Units	9" 9"	226 244	\$748.80 \$804
9-065-922370 *9-065-922360	Scrapers for 8'4" Units	9"F 7-1/2"R 9"F 7-1/2"R	241 259	\$796.80 \$856.80
9-065-924270 *9-065-924260	Scrapers for 9'6" Units	9" 9"	265 283	\$878.40 \$936
9-065-926370 *9-065-926360	Scrapers for 9'6" Units	9"F7-1/2"R 9"F7-1/2"R	280 298	\$926.40 \$9852.20
*For Units with Sp	pring Bearing Hangers			
COVER DISC				
9-065-700018	Cover Disc Assembly with 18" Blac	de w/o Scraper	40	\$266.40

9-065-700018	Cover Disc Assembly with 18" Blade w/o Scraper	40	\$266.40
9-065-709018	Cover Disc Assembly with 18" blade w/Scraper	56	\$308.40
9-065-800000	Balk Buster	23	\$198



Prices Effective as of 8-22



ATHENS 66 LIFT TYPE DISK HARROW



SPECIFICATIONS:

Cutting Width 10'6" to 15'3" Disk Spacing 7-1/2", 9" or 9" Front and 7-1/2" Rear Disk Blades – 20" or 22" Cutout Or Smooth Heavy Duty Scrapers (Extra Equipment) Category II or III Free Link Or Quick Coupler Hitch


STANDARD EQUIPMENT:

1-1/8" Cold Rolled Square Axle Relube Ball Bearings Flangette Bearing Hangers Adjustable Angle of Cut 16 Degrees To 21 Degrees Tapered Outside Rear Disk Gangs

MODEL	DISK	<u>TYPE O</u>	<u>F DISK</u>	DISK	# OF	<u>DISK SF</u>	P <u>ACING</u>	# OF	APX	SUGST
<u>NUMBER</u>	<u>DIAM</u>	FRNT	REAR	<u>THCK</u>	<u>DISK</u>	FRNT	REAR	<u>BRGS</u>	<u>WT</u>	<u>PRICE</u>
<u>10'6" WIDE</u>										
066-3032-222	20"	C.O.	C.O.	.138	30	9"	7-1/2"	8	1924	\$7,500
066-3032-642	22"	C.O.	C.O.	.177	30	9"	7-1/2"	8	2039	\$7,950
066-3032-322	20"	SM.	SM.	.138	30	9"	7-1/2"	8	1957	\$7,632
066-3032-742	22"	SM.	SM.	.177	30	9"	7-1/2"	8	2074	\$7,701.60
066-3032-522	20"	C.O.	SM.	.138	30	9"	7-1/2"	8	1941	\$7,569.60
066-3032-842	22"	C.O.	SM.	.177	30	9"	7-1/2"	8	2057	\$8,019.60
066-3212-222	20"	C.O.	C.O.	.138	32	7-1/2"	7-1/2"	8	1947	\$7,591.20
066-3212-642	22"	C.O.	C.O.	.177	32	7-1/2"	7-1/2"	8	2071	\$8,074.80
066-3212-322	20"	SM.	SM.	.138	32	7-1/2"	7-1/2"	8	1982	\$7,730.40
066-3212-742	22"	SM.	SM.	.177	32	7-1/2"	7-1/2"	8	2109	\$8,223.60
066-3212-522	20"	C.O.	SM.	.138	32	7-1/2"	7-1/2"	8	1964	\$7,656
066-3212-842	22"	C.O.	SM.	.177	32	7-1/2"	7-1/2"	8	2090	\$8,145.60
<u>10'9" WIDE</u>										
066-2822-222	20"	C.O.	C.O.	.138	28	9"	9"	8	1901	\$7,411.20
066-2822-642	22"	C.O.	C.O.	.177	28	9"	9"	8	2006	\$7,821.60
066-2822-322	20"	SM.	SM.	.138	28	9"	9"	8	1933	\$7,538.40
066-2822-742	22"	SM.	SM.	.177	28	9"	9"	8	2039	\$7,950
066-2822-522	20"	C.O.	SM.	.138	28	9"	9"	8	1916	\$7,472.40
066-2822-842	22"	C.O.	SM.	.177	28	9"	9"	8	2022	\$7,881.60



Prices Effective as of 8-22

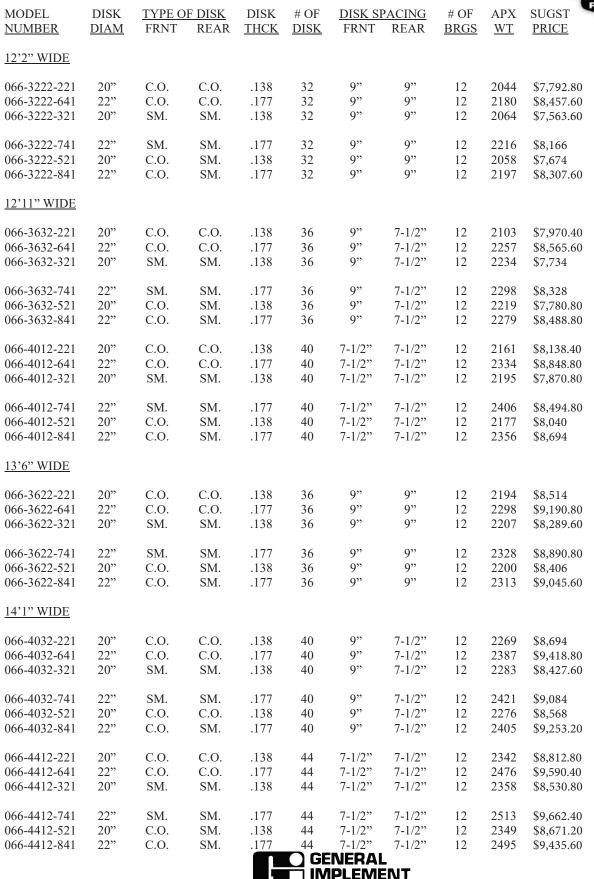






										PLOW
MODEL	DISK	TYPE C	F DISK	DISK	# OF		PACING	# OF	APX	SUGST
NUMBER	DIAM	FRNT	REAR	THCK	DISK	FRNT	REAR	BRGS	WT	PRICE
1510000000										
<u>15'0"WIDE</u>										
066-4022-221	20"	C.O.	C.O.	.138	40	9"	9"	16	2326	\$8,956.80
066-4022-641	22"	C.O.	C.O.	.177	40	9"	<i>9</i> "	16	2444	\$9,768
066-4022-321	20"	SM.	SM.	.138	40	9"	9"	16	2340	\$8,847.60
066-4022-741	22"	SM.	SM.	.177	40	9"	9"	16	2478	\$9,360
066-4022-521	20"	C.O.	SM.	.138	40	9"	9" 。"	16	2282	\$8,904
066-4022-841	22"	C.O.	SM.	.177	40	9"	9"	16	2462	\$9,561.60
15'3" WIDE										
<u>15 5 WIDE</u>										
066-4432-221	20"	C.O.	C.O.	.138	44	9"	7-1/2"	16	2388	\$9,283.20
066-4432-641	22"	C.O.	C.O.	.177	44	9"	7-1/2"	16	2522	\$10,212
066-4432-321	20"	SM.	SM.	.138	44	9"	7-1/2"	16	2404	\$9,172.80
		C) (C) (1.5.5			5 1 (2)	1.6	0.5.5.0	A A A A A A A A A A
066-4432-741	22"	SM.	SM.	.177	44	9" 9"	7-1/2"	16	2559	\$9,752.40
066-4432-521 066-4432-841	20" 22"	C.O. C.O.	SM. SM.	.138 .177	44 44	9" 9"	7-1/2" 7-1/2"	16 16	2397 2542	\$9,231.60 \$9,985.20
000-4432-841		C.O.	SIVI.	.1//	44	9	/-1/2	10	2342	\$9,965.20
066-4812-221	20"	C.O.	C.O.	.138	48	7-1/2"	7-1/2"	16	2448	\$9,618
066-4812-641	22"	C.O.	C.O.	.177	48	7-1/2"	7-1/2"	16	2598	\$10,653.60
066-4812-321	20"	SM.	SM.	.138	48	7-1/2"	7-1/2"	16	2466	\$9,505.20
066-4812-741	22"	SM.	SM.	.177	48	7-1/2"	7-1/2"	16	2638	\$10,143.60
066-4812-521	20"	C.O.	SM.	.138	48	7-1/2"	7-1/2"	16	2457	\$9,561.60
066-4812-841	22"	C.O.	SM.	.177	48	7-1/2"	7-1/2"	16	2618	\$10,400.40
									APX	SUGST
EXTRA EQU	IPMENT	-			WI	DTH	SPAG	CING	WT	PRICE
<u></u>		-				<u> </u>	<u></u>			<u></u>
9-066-928220) SC	CRAPERS	5		1()'9''	9"		336	\$ 789.60
9-066-930320) SC	CRAPERS	5		10)'6''	9"F7-1/	′2"R	360	\$ 846
9-066-932120) SC	CRAPERS	5		10)'6''	7-1/2"		384	\$ 903.60
9-066-932220) SC	CRAPERS	5		12	2'2"	9"		390	\$ 938.40
9-066-936320) SC	CRAPERS	5		12	2'11"	9"F7-1/	′2"R	422	\$ 1,050
9-066-940120) SC	CRAPERS	5		12	2'11"	7-1/2"		453	\$ 1,170
9-066-936220) SC	CRAPERS	5		13	3'6"	9"		428	\$ 1,063.20
9-066-940320) SC	CRAPERS	5		14	4'1"	9"F7-1/	′2"R	459	\$ 1,176
9-066-944120) SC	CRAPERS	5		14	4 '1''	7-1/2"		493	\$ 1,298.40
9-066-940220) SC	CRAPERS	5		15	5'0"	9"		463	\$ 1,214.40
9-066-944320) SC	CRAPERS	5		15	5'3"	9"F7-1/	′2"R	489	\$ 1,323.60
9-066-948120) SC	CRAPERS	5		15	5'3"	7-1/2"		531	\$ 1,438.80
9-066-700016		OVER DI							34	\$ 168
9-066-709016		OVER DI		H SCRAI	PERS				43	\$ 226.80
9-066-800000) BA	ALK BUS	STER	-		ENERA			23	\$ 192
						LIVERA				



PRODUCT CATEGORY

Prices Effective as of 8-22

ATHENS 97 LIFT TYPE OFFSET DISK HARROW



SPECIFICATIONS:

Cutting Width 6'2" to 9'0" Disk Spacing 9" Disk Diameter 22" or 24" Category II Hitch Relube Ball Bearings 1 ¹/₄" Cold Rolled Square Gang Axle with Gang Wrench

MODEL	DISK	<u>TYPE O</u>	<u>F DISK</u>	DISK	# OF	<u>DISK SP</u>	<u>ACING</u>	# OF	APX	SUGST
<u>NUMBER</u>	<u>DIAM</u>	FRNT	REAR	<u>THCK</u>	<u>DISK</u>	FRNT	REAR	<u>BRGS</u>	<u>WT</u>	<u>PRICE</u>
<u>6'2" WIDE</u>										
097-1627-650	22"	C.O.	C.O.	.197	16	9"	9"	6	1337	\$5,372.40
097-1627-660	24"	C.O.	C.O.	.197	16	9"	9"	6	1385	\$5,632.80
<u>6'10" WIDE</u>										
097-1827-650	22"	C.O.	C.O.	.197	18	9"	9"	8	1511	\$6,230.40
097-1827-660	24"	C.O.	C.O.	.197	18	9"	9"	8	1565	\$6,528.20
<u>7'6" WIDE</u>										
097-2027-650	22"	C.O.	C.O.	.197	20	9"	9"	8	1612	\$6,331.20
097-2027-660	24"	C.O.	C.O.	.197	20	9"	9"	8	1672	\$6,658.80
WIDE FRAME										
<u>8'4" WIDE</u>										
097-2227-650	22"	C.O.	C.O.	.197	22	9"	9"	8	1732	\$6,798
097-2227-660	24"	C.O.	C.O.	.197	22	9"	9"	8	1798	\$7,159.20
<u>9'0" WIDE</u>										
097-2427-650	22"	C.O.	C.O.	.197	24	9"	9"	8	1826	\$7,443.60
097-2427-660	24"	C.O.	C.O.	.197	24	9"	9"	8	1898	\$7,839.60

OPTIONAL EQUIPMENT

For Spring Bearing Hangers: Change the 7th Digit from 7 to 6 and add 15 lbs And \$38.40 per Bearing to Weights and Prices.





EXTRA EQUIPMENT

SCRAPERS 9-097-916270 *9-097-916260	For 6'2" Units	190 200	\$608.40 \$636
9-097-918270	For 6'10"Units	222	\$774
*9-097-918260		241	\$750
9-097-920270	For 7'6" Units	242	\$782.40
*9-097-920260		259	\$823.20
9-097-922270	For 8'4" Units	261	\$829.20
*9-097-922260		278	\$882
9-097-924270	For 9'0" Units	280	\$889.20
*9-097-924260		298	\$945.60

*For Units with Spring Bearing Hangers

COVER DISC

9-097-700018	Cover Disc Assembly with 18" Blade w/o Scraper	20 \$	115.20
9-097-709018	Cover Disc Assembly with 18" Blade w/Scraper	28 \$	134.40
101733	Cat. II & III Quick Coupler Adapter for 8'4" and 9'0" Units	7 \$	108