

STUMP GRINDER



3PH PTO Driven Hydraulic Swing

R25PS HYDRAULIC SWING FEATURES

- Quick hitch compatible
- Category I & II compatible
- Slip clutch protection
- 700 Series WearSharp© carbide teeth
- Greaseable pins
- One way cutting
- Extended frame for stable footing
- Durable HDPE deflector for help contain debris
- Depth/lift gauge



R25PSS

- Requires 2 remotes



R25PSV

- STGV valve included
- Only requires 1 remote

Stump Grinder	R25PSS	R25PSV
Recommended HP	25-80 HP	
PTO Speed (input)	540 RPM	
Rotor Size	25"	
Tooth Construction	CARBIDE BOLT INTO POCKET	
Number of Teeth	18	
Cutting Wheel Speed	1,026 RPM	
Cutting Height (above grade)	20"	
Cutting Height (below grade)	6"	
Cutting Depth (per pass)	2.25"	
Cutting Width (per pass)	22"	
Swing Arc	55°	
Protection	SLIP CLUTCH	
Hitch	CAT I & II	
Quick Hitch Compatible	YES	
Required Remotes	2	1
Length	42"	
Width	72"	
Unit Weight (lbs)	950 LBS.	950 LBS.
Base Unit	\$7,960	\$9,075

Options	Part Number	Price
R25PS Valve (incl. hoses)	STGV	\$1,620
Debris Screen 10'x5' (4 posts)	DS510	\$550

Wear Parts	Part Number	Price
WearSharp© Tooth	700-WS	\$26
Nut for tooth	500-NUT	\$1.75
Spacer	700-SPACER	\$2

R25PS VALVE

- Required for tractors with one remote
- Mounted on ergonomic adjustable arm
- Includes hoses



DEBRIS SCREEN

- Used in areas where debris from the stump grinder needs to be contained
- 10' wide by 5' high 9 oz 1000D woven PVC coated polyester
- Includes 4 posts with integrated ground spike



WEARSHARP® TOOTH

- Carbide tip
- Indexable 3 times for extended use



STUMP GRINDER

3PH PTO Direct Drive



R25PD DIRECT DRIVE FEATURES

- Quick hitch compatible
- Category I & II compatible
- Slip clutch protection
- 700 Series WearSharp® carbide teeth
- One way cutting
- Park stand



R25PD

Stump Grinder	R25PD
Recommended HP	20-45
PTO Speed (input)	540 RPM
Rotor Size	25"
Tooth Construction	CARBIDE BOLT INTO POCKET
Number of Teeth	18
Cutting Wheel Speed	540 RPM
Cutting Height (above grade)	10"
Cutting Height (below grade)	7"
Cutting Depth (per pass)	2.25"
Cutting Width (per pass)	22"
Protection	SLIP CLUTCH
Hitch	CAT I
Quick Hitch Compatible	YES
Length	37"
Width	45"
Unit Weight (lbs)	460 LBS.
Base Unit	\$3,820


Options	Part Number	Price
Extensions	132369	\$300
Debris Screen 10'x5' (4 posts)	DS510	\$550

Wear Parts	Part Number	Price
WearSharp® Tooth	700-WS	\$26
Nut for tooth	500-NUT	\$1.75
Spacer	700-SPACER	\$2



EXTENSIONS

- Hitch extensions

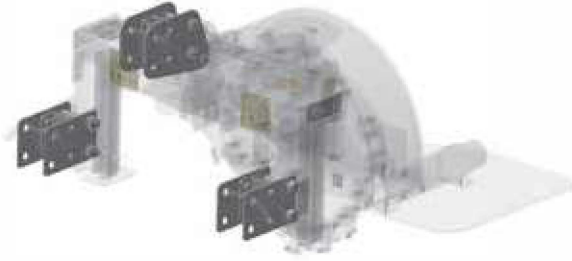

WEARSHARP® TOOTH

- Carbide tip
- Indexable 3 times for extended use



DEBRIS SCREEN

- Used in areas where debris from the stump grinder needs to be contained
- 10' wide by 5' high 9 oz 1000D woven PVC coated polyester
- Includes 4 posts with integrated ground spike

